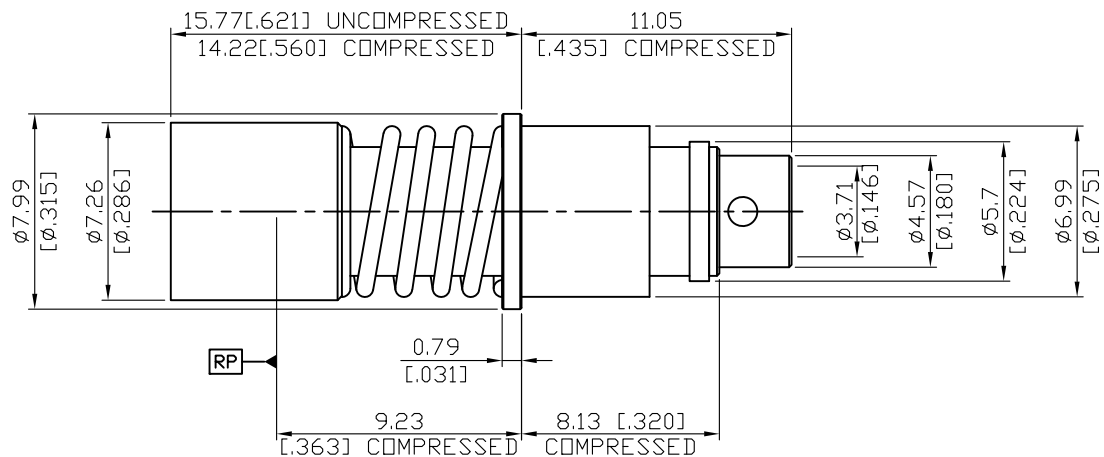


BMA8300Q1-0141

M38999/BMA Size 8 Socket For RG402;
18GHz VSWR 1.3

50Ω



Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring Ring	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Spring	Stainless Steel	Passivated
Ferrule	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Stainless Steel	Passivated

Suitable Cables: SS402; 5003; T-Flex402; Multibend402; Semi-rigid .141;
Multiflex141; Formable .141; RG402

This part number complies with RoHS.




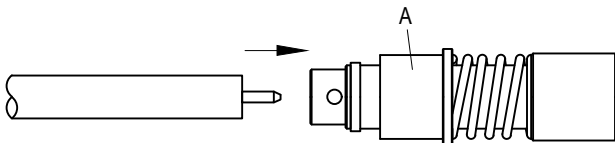
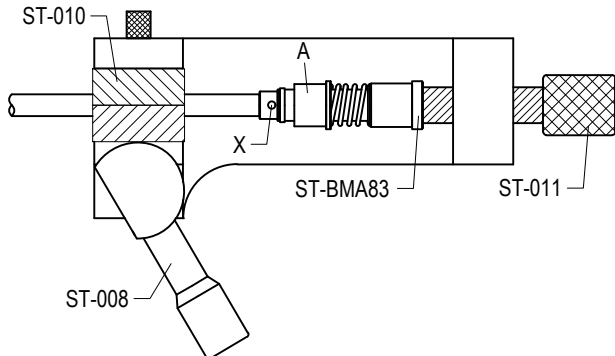
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

BMA	BMA8300Q1-0141																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 18GHz</td></tr> <tr> <td>VSWR</td><td>≤1.3 (DC to 18GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤0.03 x √f(GHz) dB</td></tr> <tr> <td>Insulation resistance</td><td>≥5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤2mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤2mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>1500 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>1000 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 18GHz	VSWR	≤1.3 (DC to 18GHz)	Insertion loss	≤0.03 x √f(GHz) dB	Insulation resistance	≥5000MΩ	Contact resistance inner conductor	≤2mΩ	Contact resistance outer conductor	≤2mΩ	Dielectric withstanding voltage (at sea level)	1500 V rms	Working voltage (at sea level)	1000 V rms
Impedance	50Ω																		
Frequency range	DC to 18GHz																		
VSWR	≤1.3 (DC to 18GHz)																		
Insertion loss	≤0.03 x √f(GHz) dB																		
Insulation resistance	≥5000MΩ																		
Contact resistance inner conductor	≤2mΩ																		
Contact resistance outer conductor	≤2mΩ																		
Dielectric withstanding voltage (at sea level)	1500 V rms																		
Working voltage (at sea level)	1000 V rms																		
Mechanical Data <table> <tr> <td>Engagement force</td><td>≤3 lbs</td></tr> <tr> <td>Disengagement force</td><td>≤1.5 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥6.1 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥1000</td></tr> </table>		Engagement force	≤3 lbs	Disengagement force	≤1.5 lbs	Contact captivation-axial	≥6.1 lbs	Durability (mating)	≥1000										
Engagement force	≤3 lbs																		
Disengagement force	≤1.5 lbs																		
Contact captivation-axial	≥6.1 lbs																		
Durability (mating)	≥1000																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to+165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to+165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to+165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Soldering fixture</td><td>ST-008</td></tr> <tr> <td>Insert for .141inch semi-rigid cable</td><td>ST-010</td></tr> <tr> <td>Locator tool</td><td>ST-011 & ST-BMA83</td></tr> </table>		Soldering fixture	ST-008	Insert for .141inch semi-rigid cable	ST-010	Locator tool	ST-011 & ST-BMA83												
Soldering fixture	ST-008																		
Insert for .141inch semi-rigid cable	ST-010																		
Locator tool	ST-011 & ST-BMA83																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

BMA8300Q1-0141		DATE	2018/09/05	REV	—
A  BODY					
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: SHARPEN CENTER CONDUCTOR TIP.		
			Step 3: SLIDE CABLE INTO CONNECTOR BODY "A".		
			Step 4: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-010 " AND LOCATOR TOOL " ST-011 " AND " ST-BMA83 " TO FIX THE CONNECTOR. SOLDER IN " X ".		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

BMA8300Q1-0141

