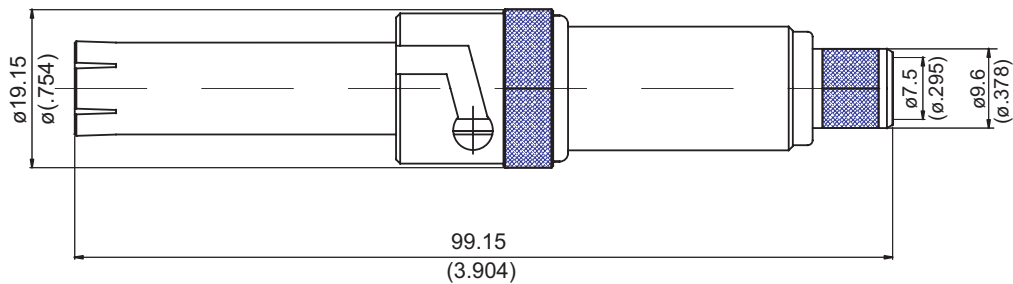


20KV-3100-0213

20KV Plug Crimp



Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 5 Over Nickel 50 Over Copper 50
Barrel	Brass	Nickel 100 over Copper 50
Ferrule	Brass	Nickel 100 over Copper 50
Gasket	Silicon	
Insulator	Hight Density PE	
Spring	SK5	Nickel 100 over Copper 50
Washer	Brass	Nickel 100 over Copper 50
Coupling Nut	Brass	Nickel 100 over Copper 50
Body	Brass	Nickel 100 over Copper 50

Weight: 51.18 g

Suitable Cables: RG213

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

20KV-3100-0213

JYE BAO CO., LTD.

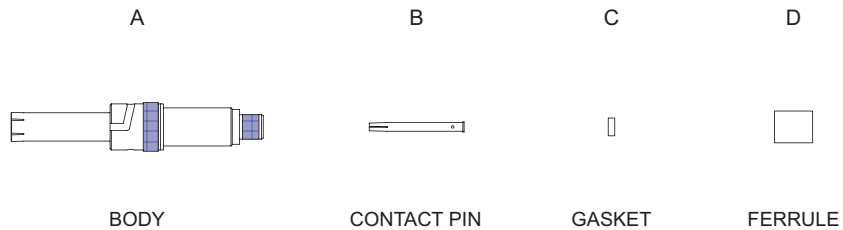






DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP AS SHOWN .
	Step 2: SLIDE FERRULE " D " AND GASKET " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y " .
	Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.
	Step 5: SLIDE FERRULE " D " TOWARDS THE CONNECTOR " A " AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.