


NO.	COMPONENTS	IMPEDANCE
1	2.4 MALE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	

**TEST LEAD WITH EXTRA STURDY  
CABLE / CONNECTOR CONNECTION.**

2.4 MALE

2.4 MALE

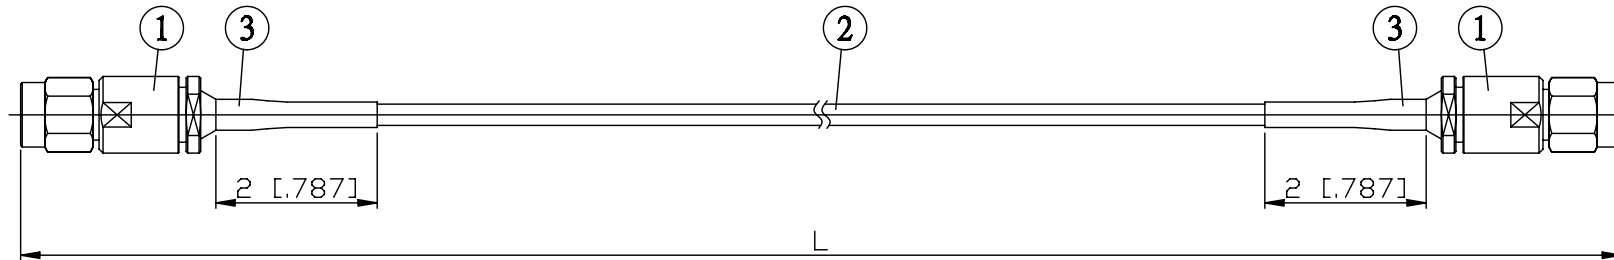

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
24302430-5002-50G50	50	-16dB	50 (19.685)
24302430-5002-50G100			100 (39.370)
24302430-5002-50G150			150 (59.055)
24302430-5002-50G200			200 (78.740)
24302430-5002-50GXXX			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY 2.4 PLUG TO 2.4 PLUG
	JYE BAO DRAWING NO. 24302430-5002-50GXXX