


NO.	COMPONENTS	IMPEDANCE
1	2.4 MALE	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/05/09	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

2.4 MALE

2.4 MALE

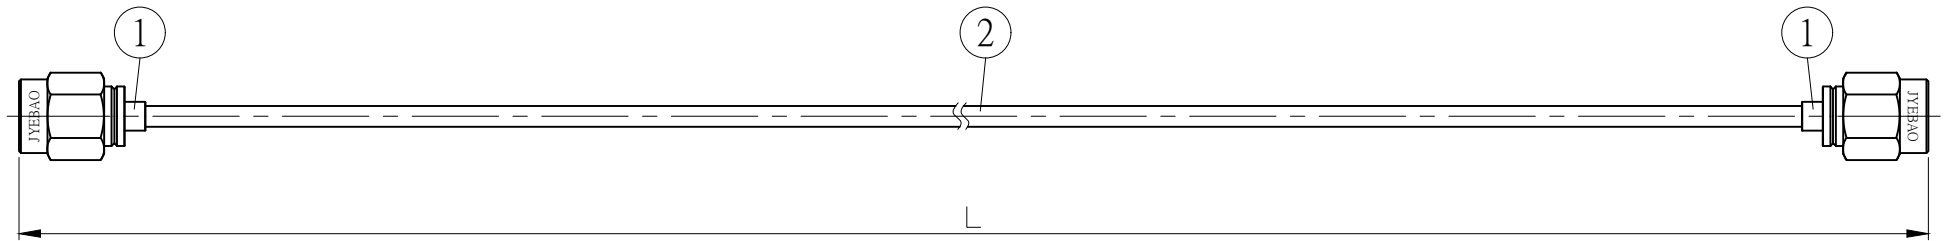

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
24302430-85T-50GXXX	50	-16dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY 2.4 PLUG TO 2.4 PLUG
	JYE BAO DRAWING NO. 24302430-85T-50GXXX