NO.	COMPONENTS	IMPEDANCE
1	2.4 FEMALE RIGHT ANGLE	50 OHM
2	6002A	50 OHM
3	SLEEVE	
4	3.5 FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
–	INITIAL RELEASE	2021/05/13	

2.4 FEMALE
RIGHT ANGLE

3.5 FEMALE
RIGHT ANGLE

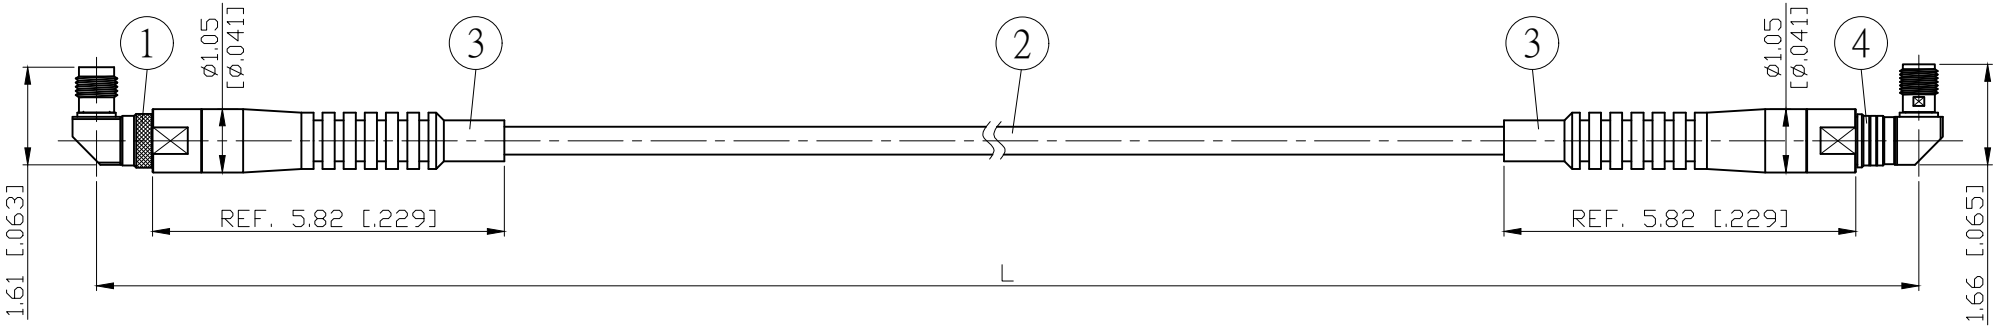

L CM (INCH)	L1 M (MM)
50 (19.685)	0.487 (487.0)
100 (39.370)	0.987 (987.0)
150 (59.055)	1.487 (1487.0)
200 (78.740)	1.987 (1987.0)
Custom length in CM	– – –

Spec	Phase stability vs bending(1)	Amplitude stability vs bending(2)	Max VSWR	Max IL	Flexure life cycle(3)
3GHz	±0.3˚ typ / ±0.5˚ max	±0.005dB typ / ±0.01dB max	1.12 : 1	≤ (0.0128dB/cm*Lcm)+0.15dB	≥ 100000
6GHz	±0.5˚ typ / ±0.75˚ max	±0.0075dB typ / ±0.015dB max	1.15 : 1	≤ (0.0189dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75˚ typ / ±1.0˚ max	±0.01dB typ / ±0.02dB max	1.20 : 1	≤ (0.0293dB/cm*Lcm)+0.25dB	
18GHz	±1.0˚ typ / ±1.5˚ max	±0.015dB typ / ±0.03dB max	1.25 : 1	≤ (0.0361dB/cm*Lcm)+0.30dB	
26.5GHz	±1.5˚ typ / ±2.0˚ max	±0.02dB typ / ±0.04dB max	1.25 : 1	≤ (0.0450dB/cm*Lcm)+0.40dB	

Notes:
1. Operating Temp.: -40˚C / +85˚C
2. Static bend radius 13.8mm
3. Dynamic bend radius 30mm
4. RoHS Compliant

(1) Per IEC 60966-1, section 8.6, method 1
(2) Per IEC 60966-1, section 8.4
(3) Per IEC 60966-1, section 9.3

NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M
4	U-3.5-F-RA	3.5 JACK R/A	1	EA
3	U-6002A	SLEEVE	2	EA
2	6002A	CABLE	SEE TABLE L1	M
1	U-2.4-F-RA	2.4 JACK R/A	1	EA

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.

STANDARD	REV –	UNIT CM(INCH)
APPROVED	DATE	
CHECKED	DATE	
DRAWING Albert	DATE	

JYE BAO CO., LTD.
TAIPEI TAIWAN

DESCRIPTION
CABLE ASSEMBLY 2.4 JACK R/A TO 3.5 JACK R/A

JYE BAO DRAWING NO.
2489PC89-62A-26.5GXXX