

7/16-3100-0223	7/16 plug crimp for RG223; 0.9GHz VSWR 1.2	50Ω																					
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating(Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Gasket</td><td>Brass</td><td></td></tr> <tr> <td>Contact Pin</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Coupling Nut</td><td>Brass</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> </tbody> </table>			Parts	Material	Plating(Micro-inch)	Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Brass		Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating(Micro-inch)																					
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Gasket	Brass																						
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Insulator	Teflon																						
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Suitable Cables: RG223																							

This part number complies with RoHS.


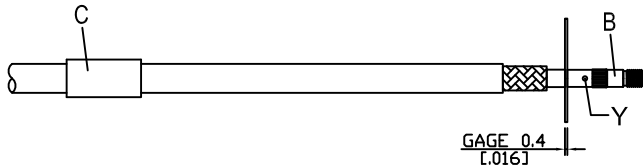
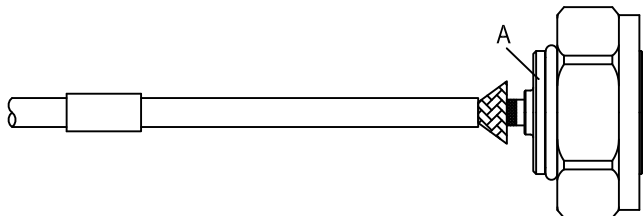
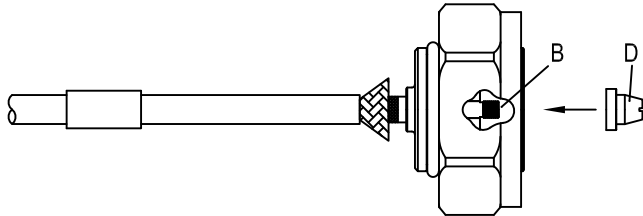
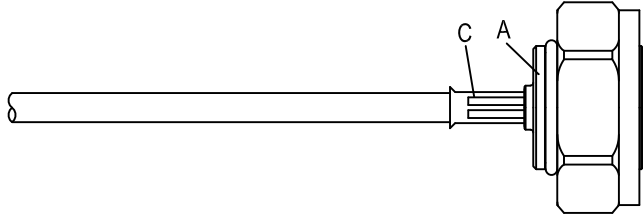
Notice: JYBAO reserves the right to make modifications deemed appropriate.

7/16	7/16-3100-0223																				
Interface IEC 60169-4																					
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 0.9GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC to 0.9GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤ 0.05dB</td></tr> <tr> <td>Insulation resistance</td><td>≥ 10000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤ 0.4mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤ 1.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>4000 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>2700 V rms</td></tr> <tr> <td>Rf leakage</td><td>≥ 128dB to 1GHz</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 0.9GHz	VSWR	≤ 1.2 (DC to 0.9GHz)	Insertion loss	≤ 0.05dB	Insulation resistance	≥ 10000MΩ	Contact resistance inner conductor	≤ 0.4mΩ	Contact resistance outer conductor	≤ 1.5mΩ	Dielectric withstanding voltage (at sea level)	4000 V rms	Working Voltage (at sea level)	2700 V rms	Rf leakage	≥ 128dB to 1GHz
Impedance	50Ω																				
Frequency range	DC to 0.9GHz																				
VSWR	≤ 1.2 (DC to 0.9GHz)																				
Insertion loss	≤ 0.05dB																				
Insulation resistance	≥ 10000MΩ																				
Contact resistance inner conductor	≤ 0.4mΩ																				
Contact resistance outer conductor	≤ 1.5mΩ																				
Dielectric withstanding voltage (at sea level)	4000 V rms																				
Working Voltage (at sea level)	2700 V rms																				
Rf leakage	≥ 128dB to 1GHz																				
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>260 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>310 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥ 221 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥ 45 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Recommended coupling nut torque	260 inch lbs	Coupling proof torque	310 inch lbs	Coupling nut retention force	≥ 221 lbs	Contact captivation-axial	≥ 45 lbs	Durability (mating)	≥ 500										
Recommended coupling nut torque	260 inch lbs																				
Coupling proof torque	310 inch lbs																				
Coupling nut retention force	≥ 221 lbs																				
Contact captivation-axial	≥ 45 lbs																				
Durability (mating)	≥ 500																				
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method107, Condition B	Moisture resistance	MIL-STD-202, Method106	Corrosion	MIL-STD-202, Method101, Condition B	RoHS	Compliant										
Temperature range	-65°C to +165°C																				
Thermal shock	MIL-STD-202, Method107, Condition B																				
Moisture resistance	MIL-STD-202, Method106																				
Corrosion	MIL-STD-202, Method101, Condition B																				
RoHS	Compliant																				
Tooling <table> <tr> <td>Crimping tool</td><td>CRT-1 or CRT-2</td></tr> <tr> <td>Crimp insert</td><td>INSERT-B</td></tr> <tr> <td>Soldering gauge</td><td>ST-0.4</td></tr> </table>		Crimping tool	CRT-1 or CRT-2	Crimp insert	INSERT-B	Soldering gauge	ST-0.4														
Crimping tool	CRT-1 or CRT-2																				
Crimp insert	INSERT-B																				
Soldering gauge	ST-0.4																				

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

7/16-3100-0223		DATE	2014/04/29	REV	—
A  BODY B  CONTACT PIN C  FERRULE D  FERRULE		DIAGRAM 	ASSEMBLY INSTRUCTION Step 1: STRIP AS SHOWN.		
	Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT 0.4 MM GAGE ST-0.4 IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CONTACT PIN " B " AND SOLDER IN " Y ".				
	Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.				
	Step 5: SCREW " D " ON CONTACT PIN " B ". (USE A FEW THREAD LOCKERS)				
	Step 6: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 5.9mm/0.232inch HEX SECTION OF INSERT-B)				
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

7/16-3100-0223

S11

