



7/16-8346A-0250/PVC

7/16 Jack Solder For Panel Receptacle 50Ω

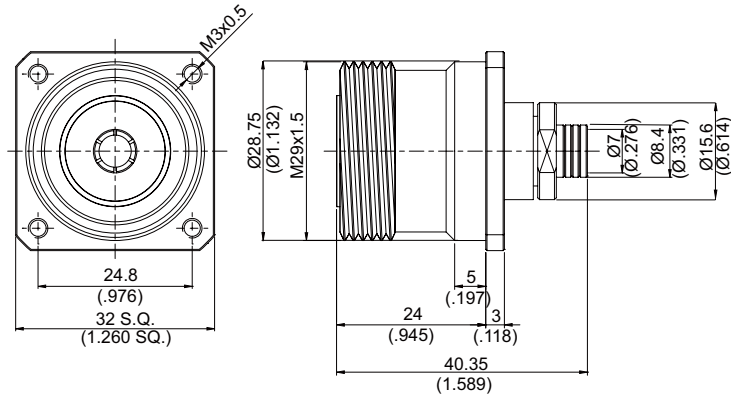

**MOUNTING HOLE**



NOTE : Low inter modulation design

Parts	Material	Plating(Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Solder Ferrule	Brass	Gold 5 Over Nickel 50 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Silver 150 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

Suitable Cables: .250 inch jacketed handendable cable


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

## CABLE ASSEMBLY INSTRUCTION

7/16-8346A-0250/PVC

JYE BAO CO., LTD.



**BODY**



**SOLDER  
FERRULE**




**NUT**

**DIAGRAM**


**ASSEMBLY INSTRUCTION**




Step 1: STRIP AS SHOWN .



Step 2: SHARPEN CENTER CONDUCTOR TIP.

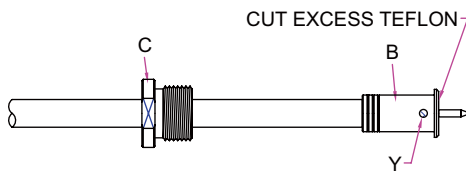

Step 3: SLIDE NUT " C " OVER CABLE .  
Step 4: PUT SOLDER FERRULE " B " ON PREPARED CABLE AND SOLDER IN " Y " .  
Step 5: STRIP EXCESS TEFLON AFTER SOLDERING .

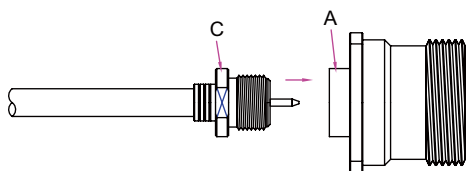

Step 6: FINALLY SCREW " C " ON THE CONNECTOR BODY " A " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.