


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5004	50 OHM
3	HEAT SHRINKING TUBE	
4	2.4 MALE	50 OHM

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

SMA MALE

2.4 MALE

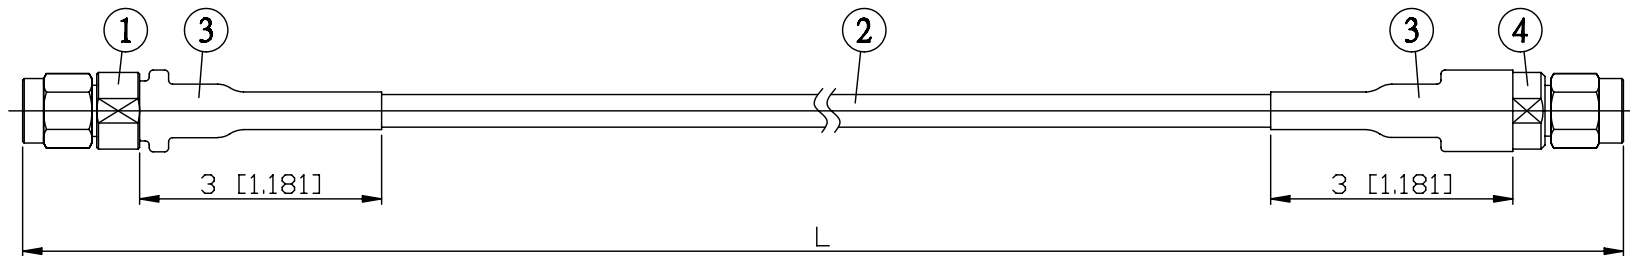

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A302430-5004-18G50	18	-20dB	50 (19.685)
A302430-5004-18G100			100 (39.370)
A302430-5004-18G150			150 (59.055)
A302430-5004-18G200			200 (78.740)
A302430-5004-18GXXX			CUSTOM LENGTH IN CM

<p>LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.</p>	<p>JYE BAO CO., LTD.</p> <p>TAIPEI TAIWAN</p>
	<p>DESCRIPTION</p> <p>CABLE ASSEMBLY SMA PLUG TO 2.4 PLUG</p>
	<p>JYE BAO DRAWING NO.</p> <p>A302430-5004-18GXXX</p>