



NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2016/01/20	

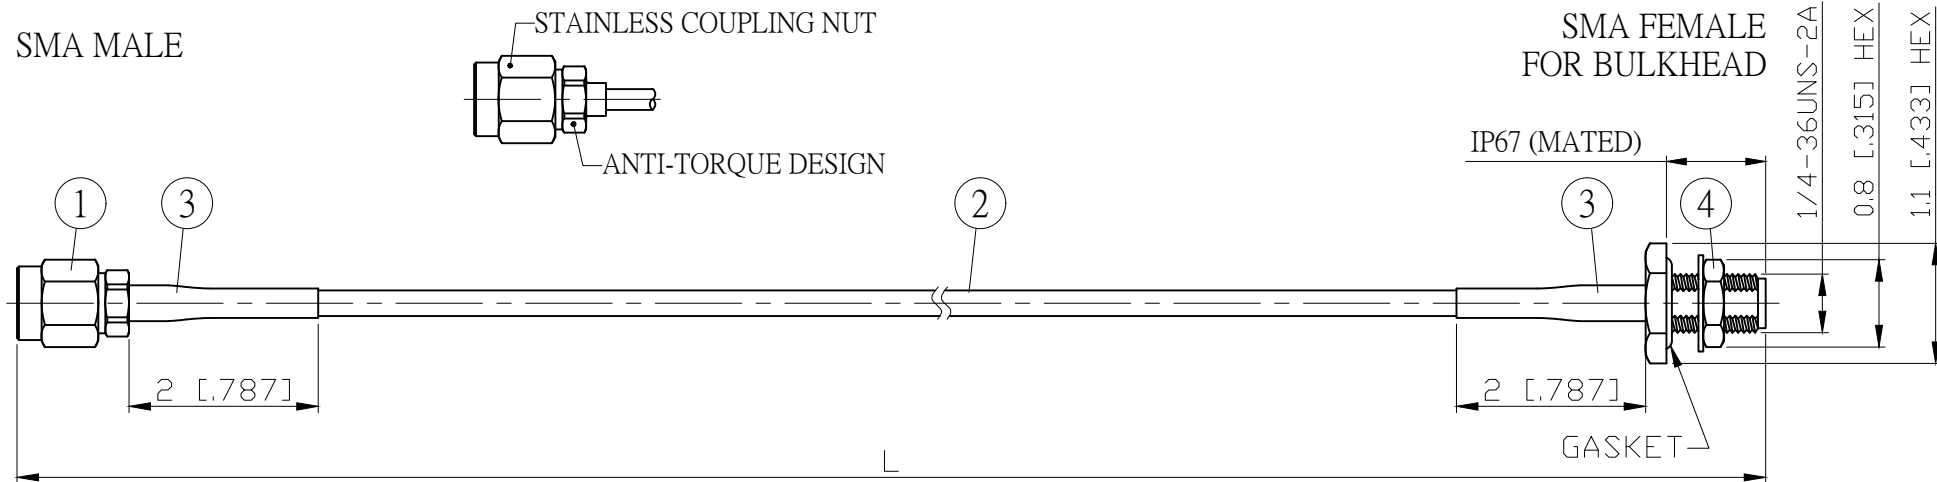

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 FT (MM)
A30A85-85F-18GXXX	18	-18dB	50 (19.685)	1.601 (488.0)
			100 (39.370)	3.241 (988.0)
			150 (59.055)	4.882 (1488.0)
			200 (78.740)	6.522 (1988.0)
			CUSTOM LENGTH IN CM	CUSTOM LENGTH IN CM



					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.		
LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.					APPROVED		DATE	TAIPEI TAIWAN		
					CHECKED		DATE	DESCRIPTION	CABLE ASSEMBLY SMA PLUG TO SMA JACK FOR BULKHEAD	
					DRAWING	Albert	DATE	JYE BAO DRAWING NO.	A30A85-85F-18GXXX	
4	SMA8305-0405	SMA JACK	1	EA						
3	G5(F)-4.0MM-BLACK	TUBE	0.04	M						
2	.085SRF-W-P-50-F	CABLE	L1 (SEE TABLE)	FT						
1	SMA33AT-0405	SMA PLUG	1	EA						
NO.	PARTS NO.	DESCRIPTION	QTY	U/M						