



NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	.085" HANDBENDABLE CABLE (= JYEBAO P/N .085SRF-W-P-50)	50 OHM
3	SMA FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2016/01/20	

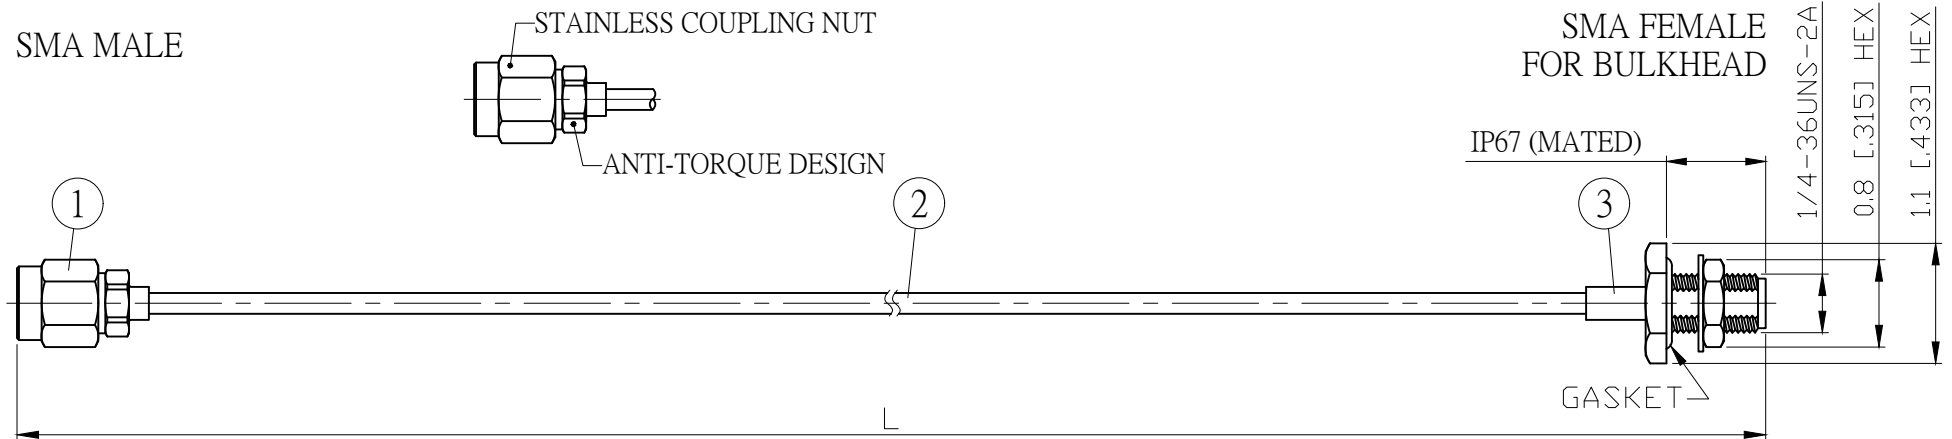

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 FT (MM)
A30A85-85S-18GXXX	18	-18dB	50 (19.685)	1.603 (488.5)
			100 (39.370)	3.243 (988.5)
			150 (59.055)	4.884 (1488.5)
			200 (78.740)	6.524 (1988.5)
			CUSTOM LENGTH IN CM	CUSTOM LENGTH IN CM



				STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
				APPROVED		DATE	
				CHECKED		DATE	
				DRAWING Albert		DATE	
3	SMA8305-0085	SMA JACK	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.		DESCRIPTION CABLE ASSEMBLY SMA PLUG TO SMA JACK FOR BULKHEAD
2	.085SRF-W-P-50	CABLE	L1 (SEE TABLE)	FT			JYE BAO DRAWING NO. A30A85-85S-18GXXX
1	SMA33AT-0085	SMA PLUG	1	EA			
NO.	PARTS NO.	DESCRIPTION	QTY	U/M			