


| NO. | COMPONENTS | IMPEDANCE |
|-----|---------------------|-----------|
| 1 | SMA MALE | 50 OHM |
| 2 | 5003 | 50 OHM |
| 3 | HEAT SHRINKING TUBE | |
| 4 | K MALE | 50 OHM |

**TEST LEAD WITH EXTRA STURDY
CABLE / CONNECTOR CONNECTION.**

SMA MALE

K MALE

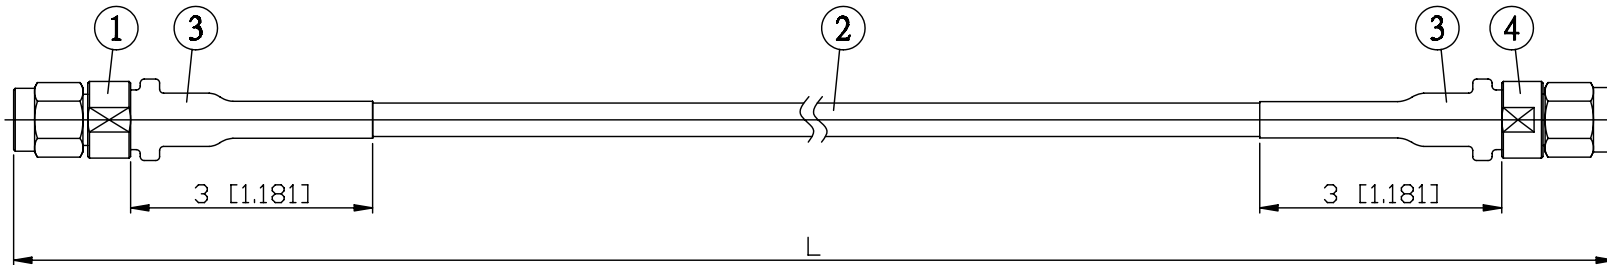

| JYE BAO P/N | Freq. (GHz) | Max. Return Loss | L CM (INCH) |
|--------------------|-------------|------------------|---------------------|
| A30K30-5003-18G50 | 18 | -20dB | 50 (19.685) |
| A30K30-5003-18G100 | | | 100 (39.370) |
| A30K30-5003-18G150 | | | 150 (59.055) |
| A30K30-5003-18G200 | | | 200 (78.740) |
| A30K30-5003-18GXXX | | | CUSTOM LENGTH IN CM |

| | |
|--|--|
| LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER. | JYE BAO CO., LTD. TAIPEI TAIWAN |
| | DESCRIPTION CABLE ASSEMBLY SMA PLUG TO K PLUG |
| | JYE BAO DRAWING NO. A30K30-5003-18GXXX |