


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	5005N	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

**TEST LEAD WITH EXTRA STURDY  
CABLE / CONNECTOR CONNECTION.**

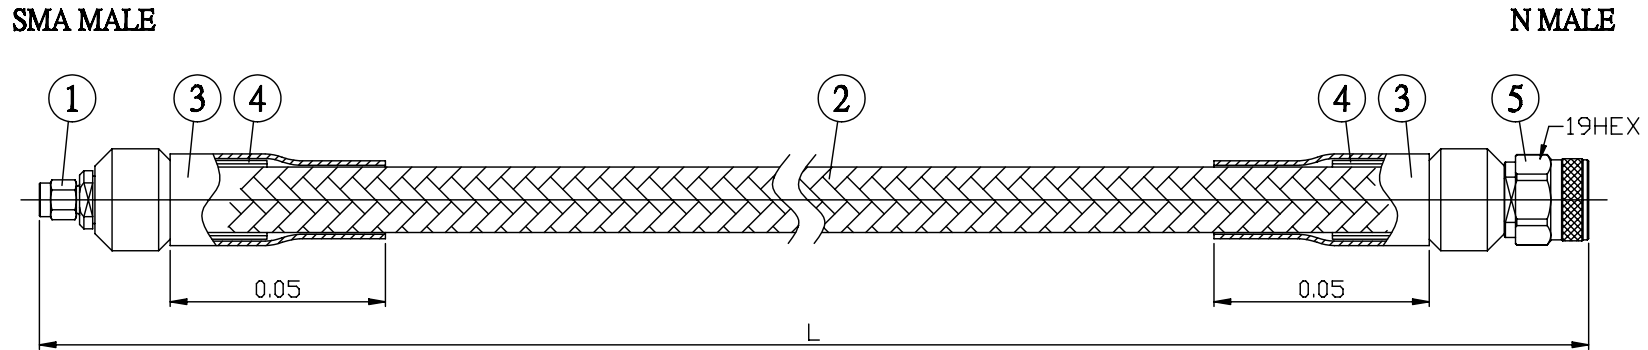

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A30N30-5005N-18G50	18	-18dB	50 (19.685)
A30N30-5005N-18G100			100 (39.370)
A30N30-5005N-18G150			150 (59.055)
A30N30-5005N-18G200			200 (78.740)
A30N30-5005N-18GXXX			CUSTOM LENGTH IN CM

**NOTE:**  
 VERY FLEXIBLE RUGGEDIZED CABLE  
 (WITH STAINLESS STEEL FLEXIBLE HOSE + TIN-PLATED COPPER BRAID  
 + FIRST NYLON BRAID + SECOND NYLON BRAID).

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMA PLUG TO N PLUG
	JYE BAO DRAWING NO. A30N30-5005N-18GXXX