



NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	RG213	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

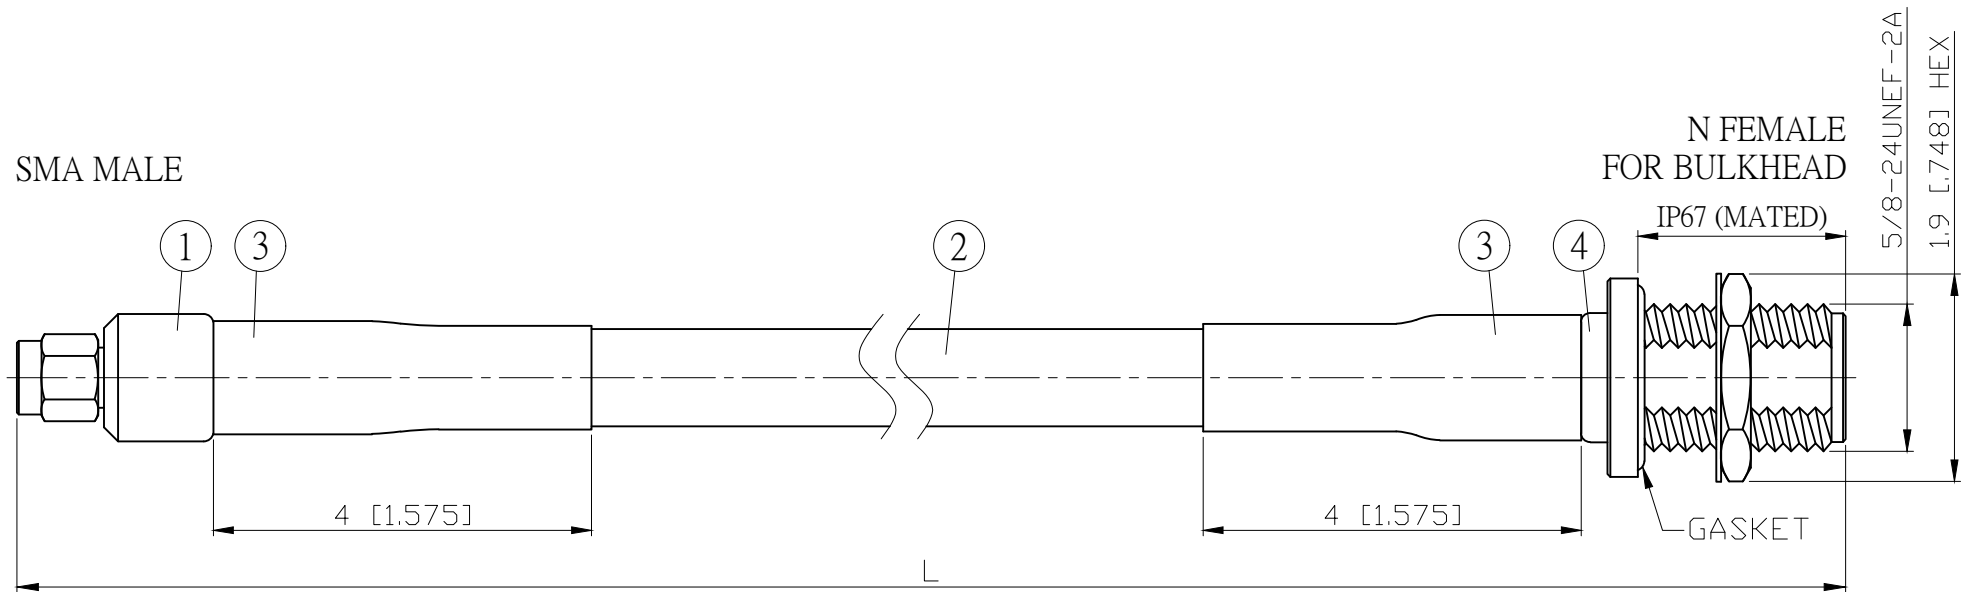

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A30N85-213-15	15 (5.906)	0.385 (117.5)
A30N85-213-30	30 (11.811)	0.878 (267.5)
A30N85-213-50	50 (19.685)	1.534 (467.5)
A30N85-213-100	100 (39.370)	3.174 (967.5)
A30N85-213-150	150 (59.055)	4.815 (1467.5)
A30N85-213-200	200 (78.740)	6.455 (1967.5)
A30N85-213-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ( UNIT: MM )					STANDARD		REV	UNIT	<b>JYE BAO CO., LTD.</b>	
LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.					APPROVED		-	CM(INCH)	TAIPEI TAIWAN	
NO.	PARTS NO.	DESCRIPTION	QTY	UM	DATE		DATE	DATE	DESCRIPTION	JYE BAO DRAWING NO.
4	N8105-0213	N JACK	1	EA					CABLE ASSEMBLY SMA PLUG TO N JACK FOR BULKHEAD	
3	G5(F)-20MM-BLACK	TUBE	0.08	M						
2	RG213	CABLE	L1 (SEE TABLE)	FT						
1	SMA3100-0213	SMA PLUG	1	EA						
NO.	PARTS NO.	DESCRIPTION	QTY	UM	Albert					A30N85-213-XXX