


| NO. | COMPONENTS | IMPEDANCE |
|-----|-----------------------------------|-----------|
| 1 | SMA MALE | 50 OHM |
| 2 | .047" TIN PLATED SEMI-RIGID CABLE | 50 OHM |
| 3 | SMP FEMALE | 50 OHM |

| REVISION | | | |
|----------|-----------------|------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | INITIAL RELEASE | 2022/03/22 | |

SMA MALE

SMP FEMALE

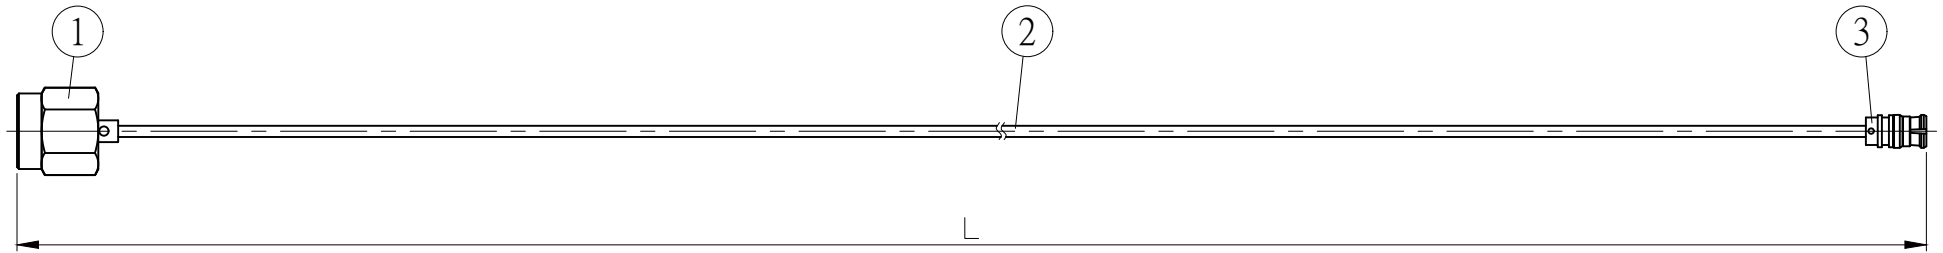

| JYE BAO P/N | Freq. (GHz) | Max. Return Loss | L CM (INCH) | L1 M (MM) |
|-------------------|-------------|------------------|---------------------|----------------|
| A30P80-47T-18GXXX | 18 | -16.5dB | 50 (19.685) | 0.494 (494.0) |
| | | | 100 (39.370) | 0.994 (994.0) |
| | | | 150 (59.055) | 1.494 (1494.0) |
| | | | 200 (78.740) | 1.994 (1994.0) |
| | | | CUSTOM LENGTH IN CM | - - - |

| | | | | | | | | |
|-----|----------------|-------------|--------------|--|--------------------------|-------|---------------|--|
| | | | | LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER. | STANDARD | REV - | UNIT CM(INCH) | JYE BAO CO., LTD. TAIPEI TAIWAN |
| | | | | | APPROVED | DATE | | |
| | | | | | CHECKED | DATE | | DESCRIPTION CABLE ASSEMBLY SMA PLUG TO SMP JACK |
| | | | | | DRAWING <i>Albert</i> | DATE | | JYE BAO DRAWING NO. A30P80-47T-18GXXX |
| 3 | SMP8300-0047 | SMP JACK | 1 | EA | | | | |
| 2 | .047TIN-W-P-50 | CABLE | SEE TABLE L1 | M | | | | |
| 1 | SMA33VT-0047 | SMA PLUG | 1 | EA | | | | |
| NO. | PARTS NO. | DESCRIPTION | QTY | U/M | | | | |