


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE	50 OHM
2	.047" TIN PLATED SEMI-RIGID CABLE	50 OHM
3	SMPM FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

SMA MALE

SMPM FEMALE
RIGHT ANGLE

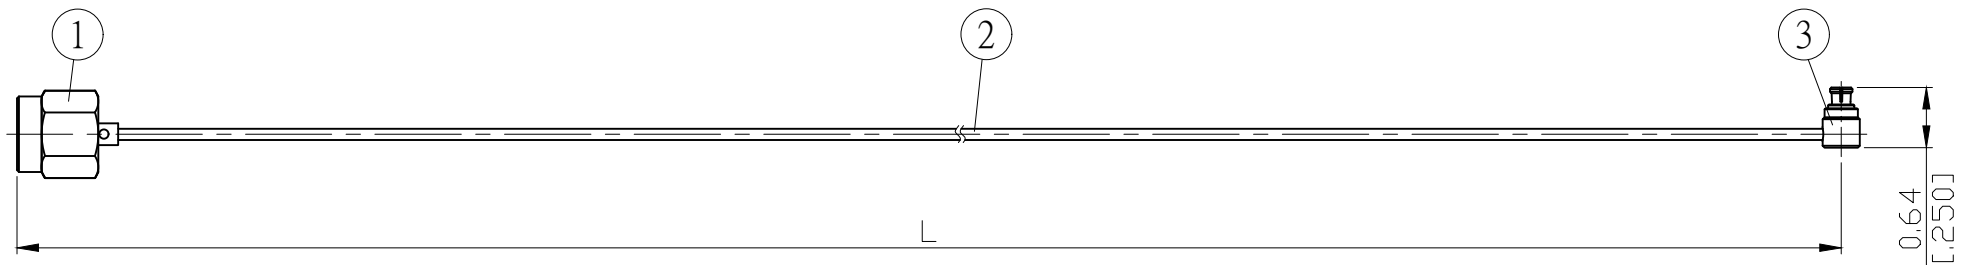

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
A30PM89-47T-18GXXX	18	-16.5dB	50 (19.685)	0.497 (497.0)
			100 (39.370)	0.997 (997.0)
			150 (59.055)	1.497 (1497.0)
			200 (78.740)	1.997 (1997.0)
			CUSTOM LENGTH IN CM	- - -

				STANDARD		REV -	UNIT CM(INCH)	JYE BAO CO., LTD.	
				APPROVED		DATE		TAIPEI TAIWAN	
				CHECKED		DATE		DESCRIPTION	
				DRAWING		DATE		JYE BAO DRAWING NO.	
3	SMPM8300-9047	SMPM JACK R/A	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.		A30PM89-47T-18GXXX		
2	.047TIN-W-P-50	CABLE	SEE TABLE L1	M					
1	SMA33VT-0047	SMA PLUG	1	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M	Albert		DATE		