


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5002	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2021/04/15	

SMA MALE
RIGHT ANGLE

SMA MALE
RIGHT ANGLE

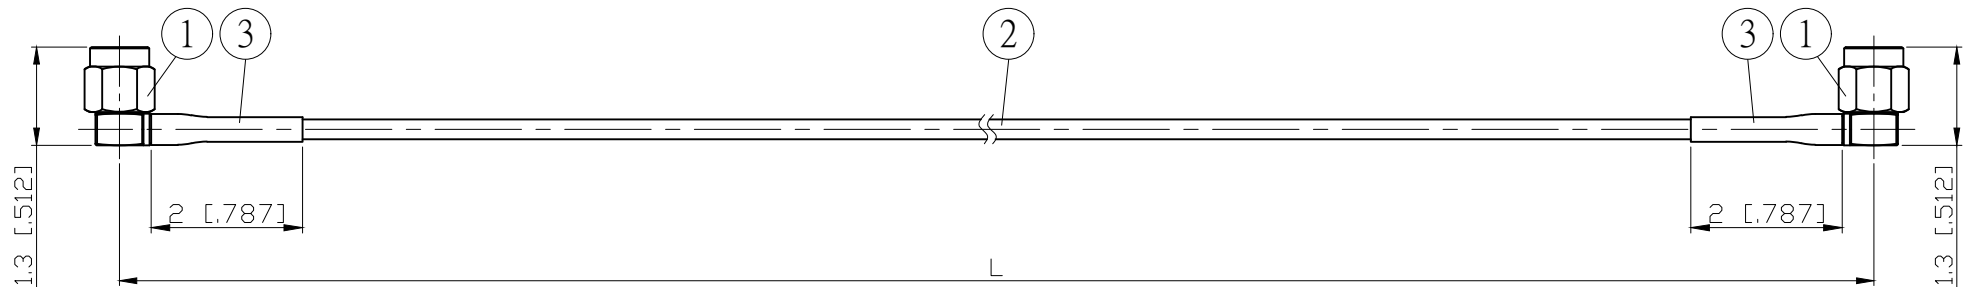

L CM (INCH)	L1 M (MM)
50 (19.685)	0.501 (501.0)
100 (39.370)	1.001 (1001.0)
150 (59.055)	1.501 (1501.0)
200 (78.740)	2.001 (2001.0)
Custom length in CM	- - -

Spec	Phase stability vs bending ⁽¹⁾	Amplitude stability vs bending ⁽²⁾	Max VSWR	Max IL	Flexure life cycle ⁽³⁾
3GHz	±0.3° typ / ±0.5° max	±0.005dB typ / ±0.01dB max	1.20 : 1	≤ (0.0128dB/cm*Lcm)+0.15dB	≥ 10000
6GHz	±0.5° typ / ±0.75° max	±0.0075dB typ / ±0.015dB max	1.25 : 1	≤ (0.0189dB/cm*Lcm)+0.20dB	
12.4GHz	±0.75° typ / ±1.0° max	±0.010dB typ / ±0.02dB max	1.30 : 1	≤ (0.0293dB/cm*Lcm)+0.25dB	
18GHz	±1.0° typ / ±1.5° max	±0.015dB typ / ±0.03dB max	1.35 : 1	≤ (0.0361dB/cm*Lcm)+0.30dB	

Notes:

- Operating Temp.: -55°C / +125°C
- Static bend radius 5.1mm
- Dynamic bend radius 30mm
- RoHS Compliant

- (1) Per IEC 60966-1, section 8.6, method 1
- (2) Per IEC 60966-1, section 8.4
- (3) Per IEC 60966-1, section 9.3

3	G5(F)-4.0MM-BLACK	TUBE	0.04	M	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD. TAIPEI TAIWAN
						APPROVED		DATE	
						CHECKED		DATE	
						DRAWING	<i>Albert</i>	DATE	
2	5002	CABLE	SEE TABLE L1	M				DESCRIPTION	CABLE ASSEMBLY SMA PLUG R/A TO SMA PLUG R/A
1	SMA33NPC-9405	SMA PLUG R/A	2	EA				JYE BAO DRAWING NO.	A39A39-52L-18GXXX
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					