


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	.085" HANDBENDABLE CABLE WITH FEP JACKET (=JYBAO P/N .085SRF-W-P-50-F)	50 OHM
3	HEAT SHRINKING TUBE	

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2015/10/19	
A	ADD 13[.512]	2020/06/01	

SMA MALE
RIGHT ANGLE

SMA MALE
RIGHT ANGLE

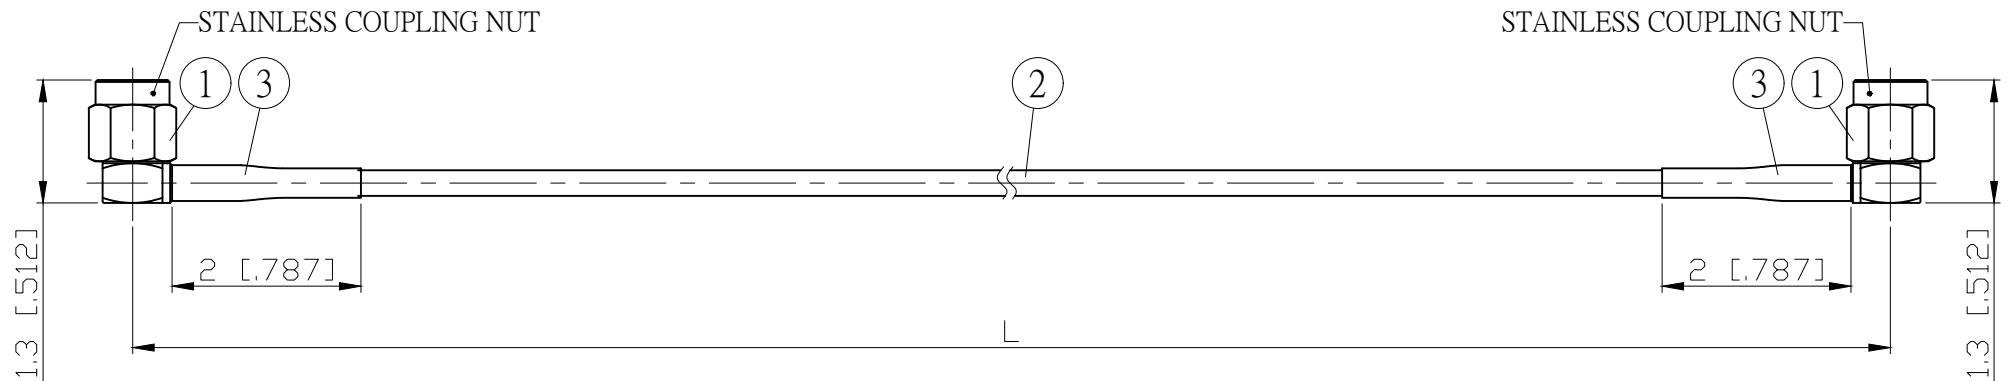

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)
A39A39-85F-18GXXX	18	-16.5dB	50 (19.685)
			100 (39.370)
			150 (59.055)
			200 (78.740)
			CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY SMA PLUG R/A TO SMA PLUG R/A

JYE BAO DRAWING NO.

A39A39-85F-18GXXX