


| NO. | COMPONENTS | IMPEDANCE |
|-----|--|-----------|
| 1 | SMA MALE RIGHT ANGLE | 50 OHM |
| 2 | .141" HANDBENDABLE CABLE (= JYBAO P/N .141SRF-W-P-50) | 50 OHM |
| 3 | SMA FEMALE | 50 OHM |

| REVISION | | | |
|----------|-----------------|------------|----------|
| REV. | DESCRIPTON | DATE | APPROVED |
| - | INITIAL RELEASE | 2016/01/20 | |

SMA MALE
RIGHT ANGLE

SMA FEMALE

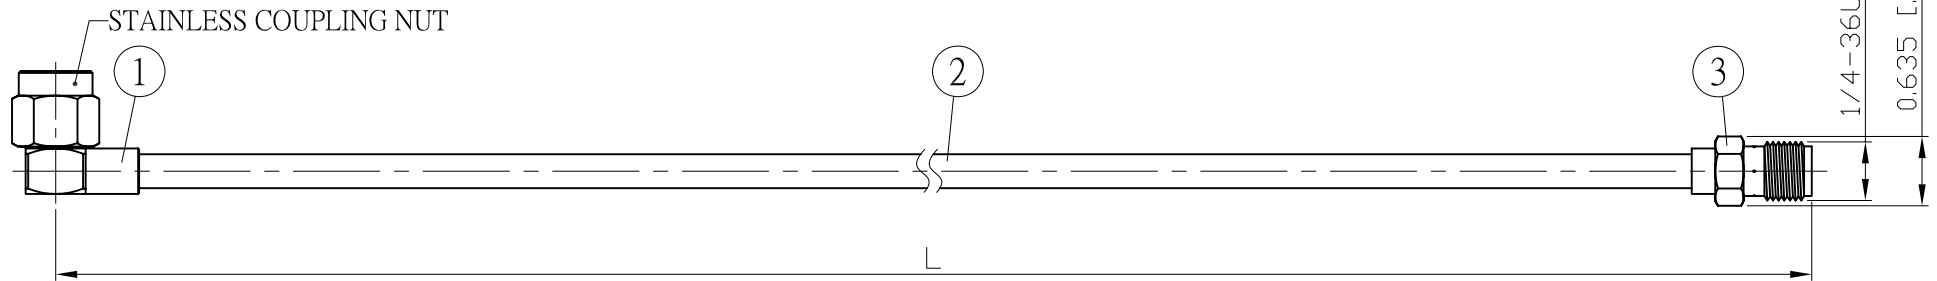

| JYE BAO P/N | Freq. (GHz) | Max. Return Loss | L CM (INCH) |
|--------------------|----------------|---------------------|------------------------|
| A39A80-141S-18GXXX | 18 | -16.5dB | 50 (19.685) |
| | | | 100 (39.370) |
| | | | 150 (59.055) |
| | | | 200 (78.740) |
| | | | CUSTOM LENGTH IN CM |

LENGTH TOLERANCE
IS $\pm 1.5\%$ OR $\pm 10\text{MM}$,
WHICHEVER IS
GREATER.

JYE BAO CO., LTD.

TAIPEI TAIWAN

DESCRIPTION

CABLE ASSEMBLY SMA PLUG R/A TO SMA JACK

JYE BAO DRAWING NO.

A39A80-141S-18GXXX