


NO.	COMPONENTS	IMPEDANCE
1	SMA MALE RIGHT ANGLE	50 OHM
2	5005	50 OHM
3	HEAT SHRINKING TUBE	
4	SMA FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2013/02/05	
A	增加接頭介面圖、註記	2014/01/13	

TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

SMA MALE
RIGHT ANGLE

SMA FEMALE
FOR BULKHEAD

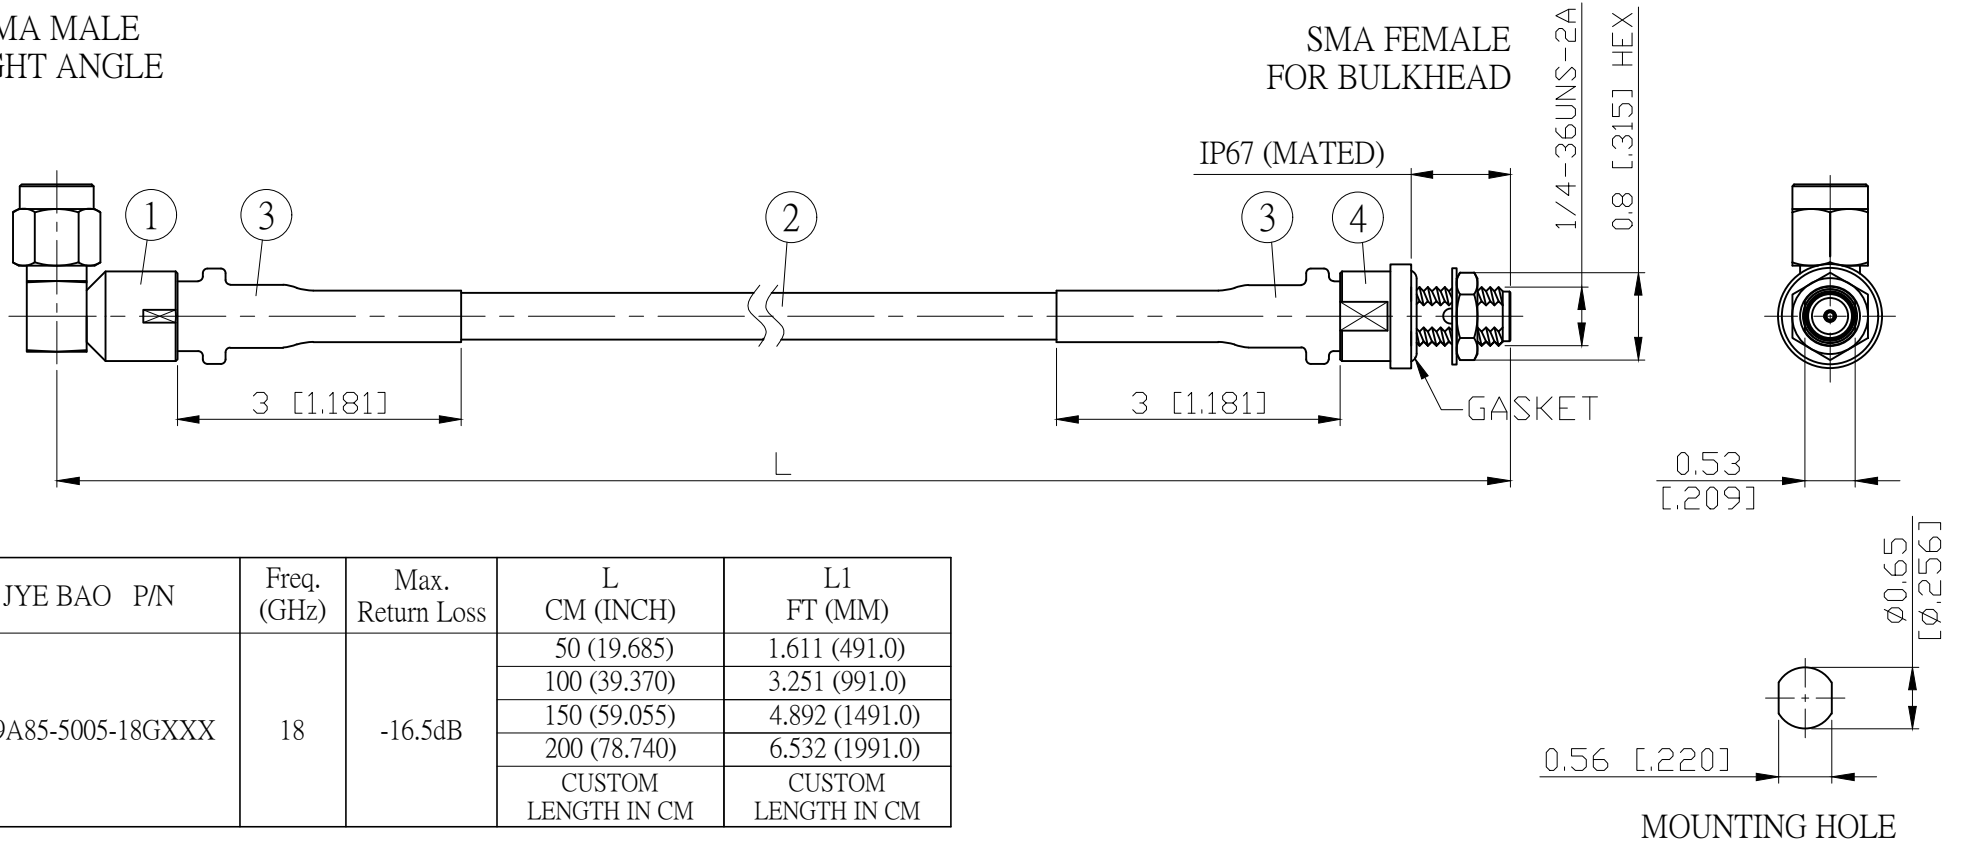

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 FT (MM)
A39A85-5005-18GXXX	18	-16.5dB	50 (19.685)	1.611 (491.0)
			100 (39.370)	3.251 (991.0)
			150 (59.055)	4.892 (1491.0)
			200 (78.740)	6.532 (1991.0)
			CUSTOM LENGTH IN CM	CUSTOM LENGTH IN CM

					STANDARD	REV A	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED		DATE	DESCRIPTION CABLE ASSEMBLY SMA PLUG R/A TO SMA FEMALE FOR BULKHEAD	
					DRAWING	Albert	DATE	JYE BAO DRAWING NO. A39A85-5005-18GXXX	
4	SMA8205S-L142	SMA JACK	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
3	G5(F)-10MM-BLACK	TUBE	0.06	M					
2	5005	CABLE	L1 (SEE TABLE)	FT					
1	SMA3200S-9L142	SMA PLUG R/A	1	EA					
NO.	PARTS NO.	DESCRIPTION	QTY	U/M					