


| NO. | COMPONENTS | IMPEDANCE |
|-----|---|-----------|
| 1 | SMA MALE RIGHT ANGLE | 50 OHM |
| 2 | .047" HANDBENDABLE CABLE (= JYEBAO P/N .047SRF-W-P-50) | 50 OHM |
| 3 | MMCX FEMALE FOR BULKHEAD | 50 OHM |

SMA MALE
RIGHT ANGLE

MMCX FEMALE
FOR BULKHEAD

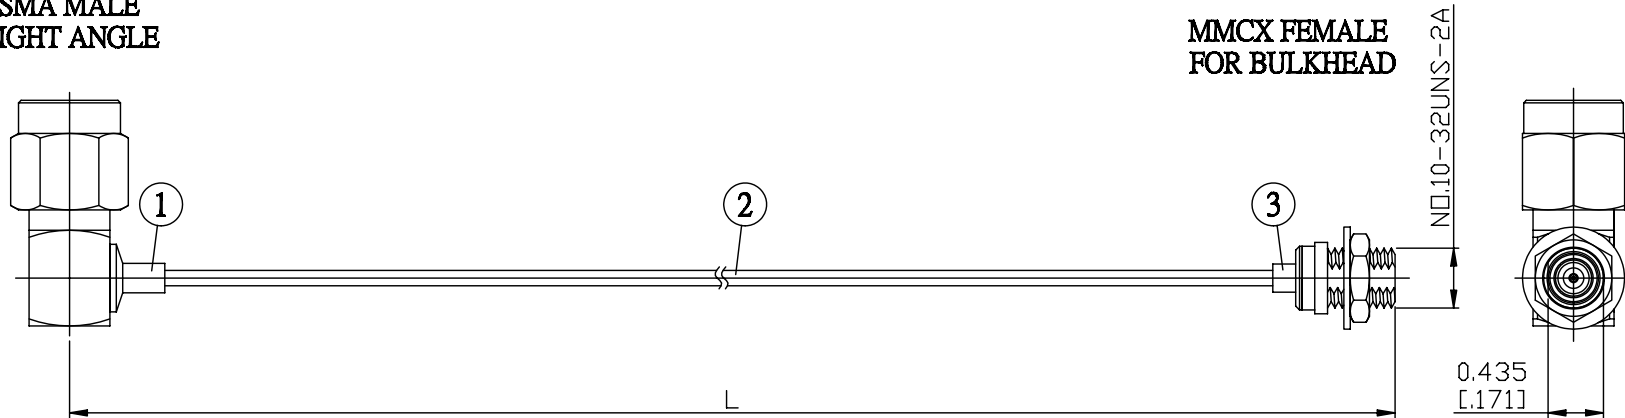

| JYE BAO P/N | L CM (INCH) |
|----------------|------------------------|
| A39E85-47S-15 | 15 (5.906) |
| A39E85-47S-30 | 30 (11.811) |
| A39E85-47S-50 | 50 (19.685) |
| A39E85-47S-100 | 100 (39.370) |
| A39E85-47S-150 | 150 (59.055) |
| A39E85-47S-200 | 200 (78.740) |
| A39E85-47S-XXX | CUSTOM LENGTH IN CM |

MOUNTING HOLE

| | |
|--|--|
| <p>LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.</p> | <p>JYE BAO CO., LTD. TAIPEI TAIWAN</p> |
| | <p>DESCRIPTION CABLE ASSEMBLY SMA PLUG R/A TO MMCX JACK FOR BULKHEAD</p> |
| | <p>JYE BAO DRAWING NO. A39E85-47S-XXX</p> |