


| NO. | COMPONENTS           | IMPEDANCE |
|-----|----------------------|-----------|
| 1   | SMA MALE RIGHT ANGLE | 50 OHM    |
| 2   | 6005A                | 50 OHM    |
| 3   | HEAT SHRINKING TUBE  |           |
| 4   | SLEEVE               |           |
| 5   | N MALE               | 50 OHM    |

| REVISION |                 |            |          |
|----------|-----------------|------------|----------|
| REV.     | DESCRIPTON      | DATE       | APPROVED |
| -        | INITIAL RELEASE | 2019/02/01 |          |

## SUPER FLEXIBLE TEST LEAD WITH EXTRA STURDY CABLE / CONNECTOR CONNECTION.

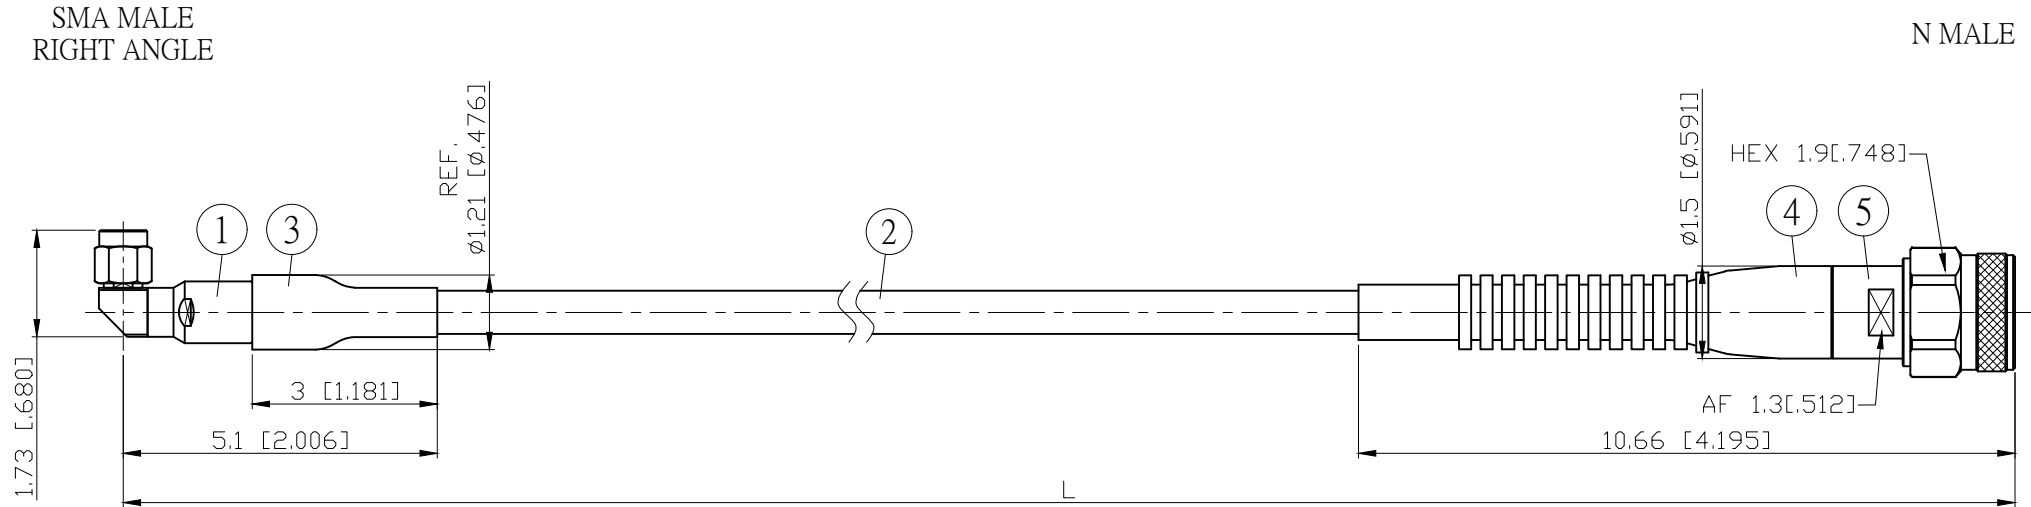

| JYE BAO P/N      | Freq. (GHz) | Max. Return Loss | L CM (INCH)         |
|------------------|-------------|------------------|---------------------|
| A39N30-65-18GXXX | 18          | -16.5dB          | 50 (19.685)         |
|                  |             |                  | 100 (39.370)        |
|                  |             |                  | 150 (59.055)        |
|                  |             |                  | 200 (78.740)        |
|                  |             |                  | CUSTOM LENGTH IN CM |

※ RoHS COMPLIANT

NOTE: TEMPERATURE RANGE: -40°C ~ +85°C

|   |  |
|---|--|
| LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER. | <b>JYE BAO CO., LTD.</b><br>TAIPEI TAIWAN            |
|   | DESCRIPTION<br>CABLE ASSEMBLY SMA PLUG R/A TO N PLUG |
|   | JYE BAO DRAWING NO.<br>A39N30-65-18GXXX              |