


NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY MALE	50 OHM
2	DOUBLE SHIELDED RG316(= RD316)	50 OHM
3	HEAT SHRINKING TUBE	
4	BNC FEMALE	50 OHM

SMA R/P MALE

BNC FEMALE

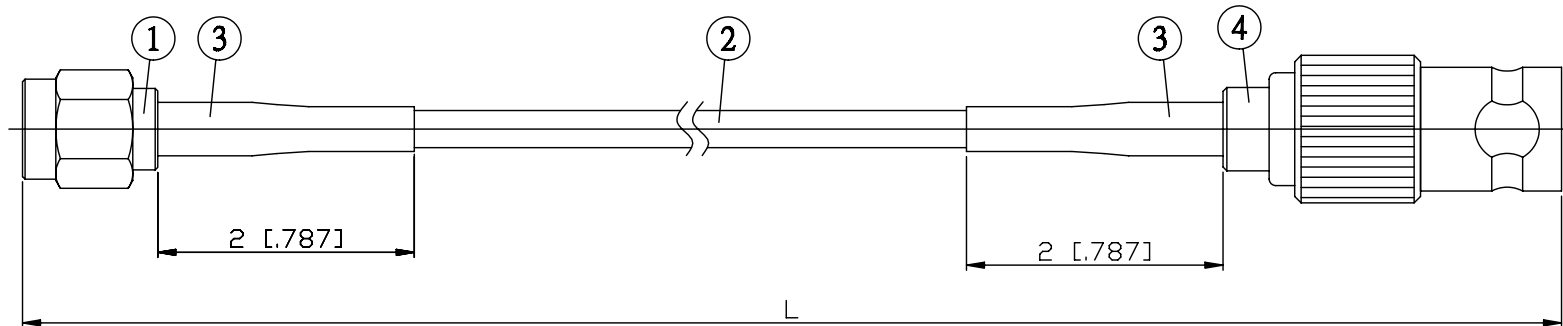

JYE BAO P/N	L CM (INCH)
A60B80-316D-15	15 (5.906)
A60B80-316D-30	30 (11.811)
A60B80-316D-50	50 (19.685)
A60B80-316D-100	100 (39.370)
A60B80-316D-150	150 (59.055)
A60B80-316D-200	200 (78.740)
A60B80-316D-XXX	CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$, WHICHEVER IS GREATER.	JYE BAO CO., LTD. TAIPEI TAIWAN
	<small>DESCRIPTION</small> CABLE ASSEMBLY SMA R/P PLUG TO BNC JACK
	<small>JYE BAO DRAWING NO.</small> A60B80-316D-XXX