


| NO. | COMPONENTS   | IMPEDANCE |
|-----|--|-----------|
| 1   | SMA REVERSE POLARITY MALE                            | 50 OHM    |
| 2   | .141" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG402) | 50 OHM    |
| 3   | BNC REVERSE POLARITY FEMALE                          | 50 OHM    |

SMA R/P MALE

BNC R/P FEMALE

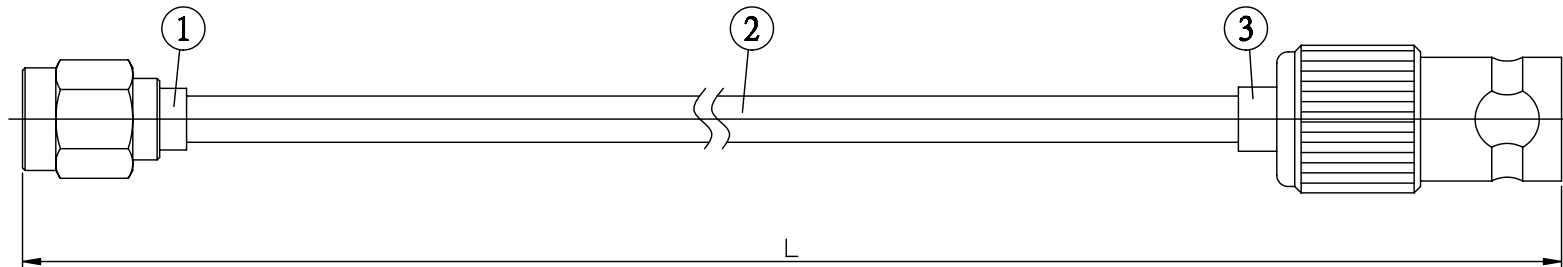

| JYE BAO P/N     | L<br>CM (INCH)         |
|-----------------|------------------------|
| A60B90-141T-15  | 15 (5.906)             |
| A60B90-141T-30  | 30 (11.811)            |
| A60B90-141T-50  | 50 (19.685)            |
| A60B90-141T-100 | 100 (39.370)           |
| A60B90-141T-150 | 150 (59.055)           |
| A60B90-141T-200 | 200 (78.740)           |
| A60B90-141T-XXX | CUSTOM<br>LENGTH IN CM |

|  |  |
|--|--|
| <p>LENGTH TOLERANCE<br/>IS <math>\pm 1.5\%</math> OR <math>\pm 10\text{MM}</math>,<br/>WHICHEVER IS<br/>GREATER.</p> | <p><b>JYE BAO CO., LTD.</b><br/>TAIPEI TAIWAN</p>                  |
|  | <p>DESCRIPTION<br/>CABLE ASSEMBLY SMA R/P PLUG TO BNC R/P JACK</p> |
|  | <p>JYE BAO DRAWING NO.<br/>A60B90-141T-XXX</p>                     |