


NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY MALE	50 OHM
2	DOUBLE SHIELDED RG316(= RD316)	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

SMA R/P MALE

N MALE

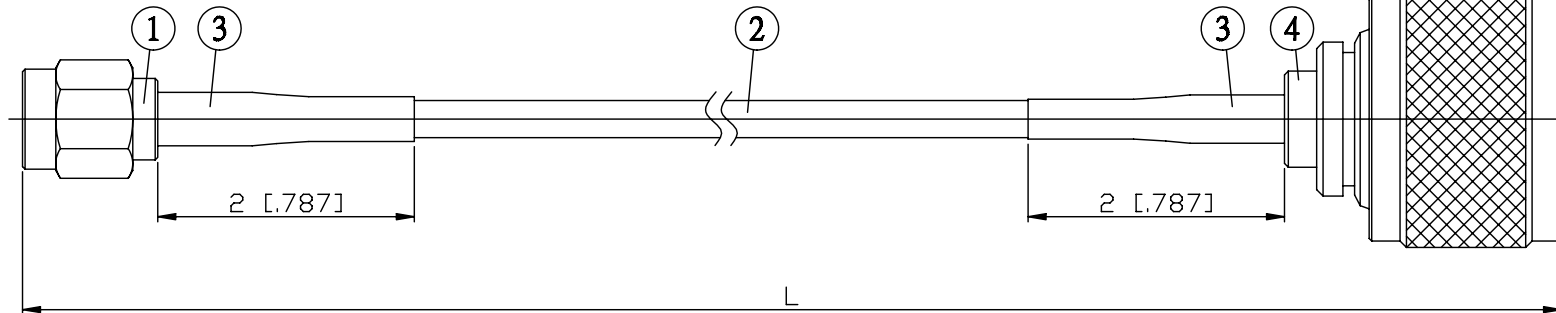

JYE BAO P/N	L CM (INCH)
A60N30-316D-15	15 (5.906)
A60N30-316D-30	30 (11.811)
A60N30-316D-50	50 (19.685)
A60N30-316D-100	100 (39.370)
A60N30-316D-150	150 (59.055)
A60N30-316D-200	200 (78.740)
A60N30-316D-XXX	CUSTOM LENGTH IN CM

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	DESCRIPTION CABLE ASSEMBLY SMA R/P PLUG TO N PLUG
	JYE BAO DRAWING NO. A60N30-316D-XXX