


NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY MALE	50 OHM
2	RG213	50 OHM
3	HEAT SHRINKING TUBE	
4	N FEMALE FOR BULKHEAD	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	

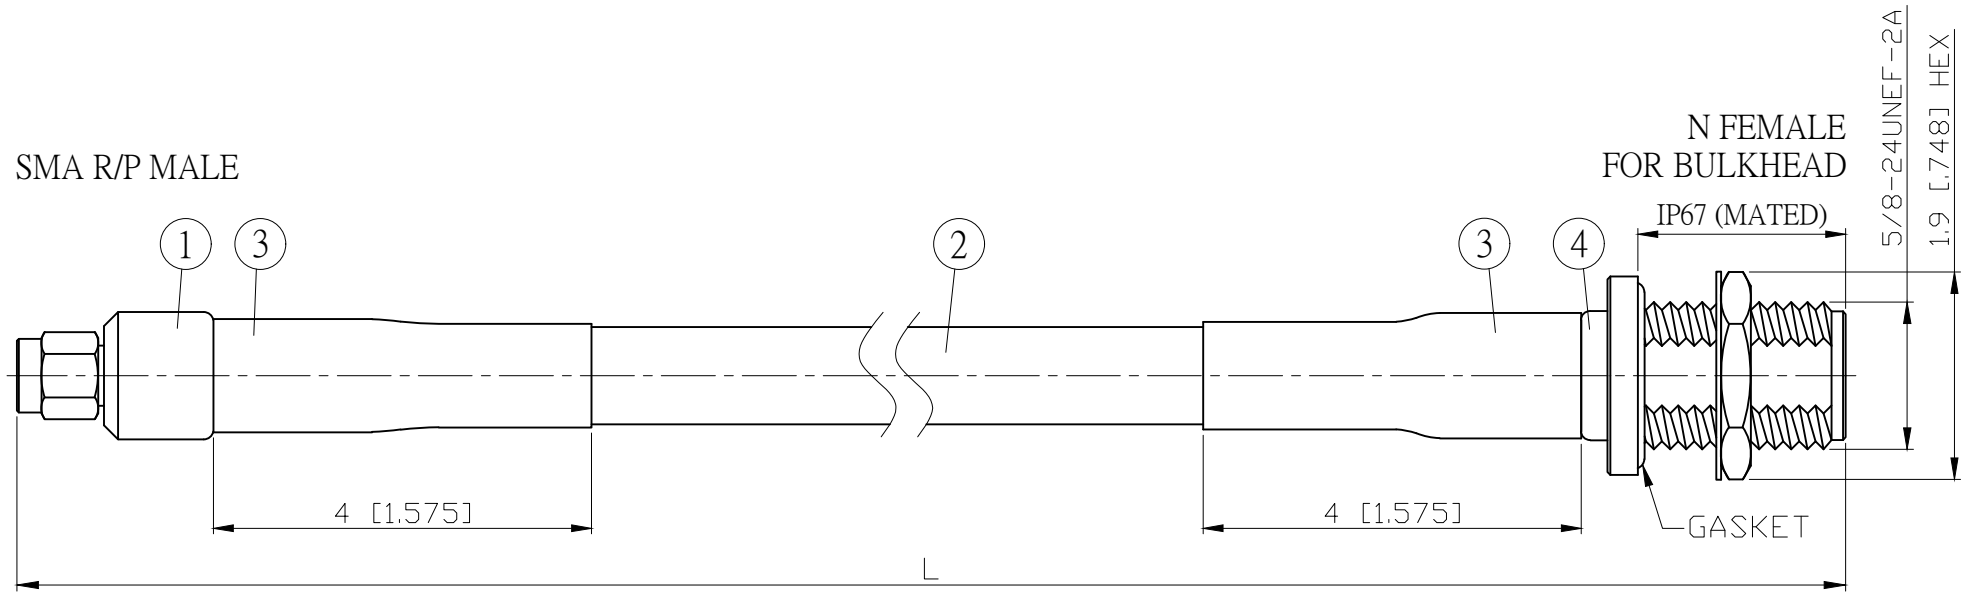

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A60N85-213-15	15 (5.906)	0.385 (117.5)
A60N85-213-30	30 (11.811)	0.878 (267.5)
A60N85-213-50	50 (19.685)	1.534 (467.5)
A60N85-213-100	100 (39.370)	3.174 (967.5)
A60N85-213-150	150 (59.055)	4.815 (1467.5)
A60N85-213-200	200 (78.740)	6.455 (1967.5)
A60N85-213-XXX	CUSTOM LENGTH IN CM	- - -

MOUNTING HOLE

4	N8105-0213	N JACK	1	EA
3	G5(F)-20MM-BLACK	TUBE	0.08	M
2	RG213	CABLE	L1 (SEE TABLE)	FT
1	SMA6100-0213	SMA R/P PLUG	1	EA
NO.	PARTS NO.	DESCRIPTION	QTY	UM

DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM)		REV	UNIT
STANDARD		-	CM(INCH)
APPROVED			DATE
CHECKED			DATE
DRAWING	Albert		DATE

JYE BAO CO., LTD.	
TAIPEI TAIWAN	
DESCRIPTION	CABLE ASSEMBLY SMA R/P PLUG TO N JACK FOR BULKHEAD
JYE BAO DRAWING NO.	A60N85-213-XXX

LENGTH TOLERANCE
IS ±1.5% OR ±10MM,
WHICHEVER IS
GREATER.