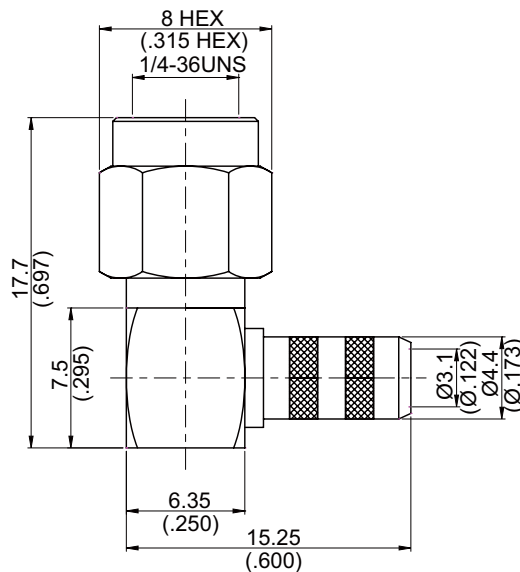


SMA3100-9L200

**SMA Plug Crimp Right Angle**  
For JBY200,LMR200; 6GHz VSWR 1.2 **50Ω**



| Parts         | Material         | Plating(Micro-inch)                                   |
|---------------|------------------|-------------------------------------------------------|
| Ferrule       | Copper           | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Cover         | Brass            | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Retainer Ring | Beryllium Copper | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Gasket        | Silicon          |                                                       |
| Contact Pin   | Brass            | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Insulator     | Teflon           |                                                       |
| Barrel        | Brass            | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Body          | Brass            | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Coupling Nut  | Brass            | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |

Suitable Cables:JBY200,LMR200

**This part number complies with RoHS.**



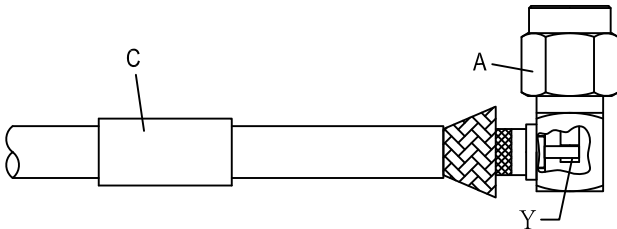
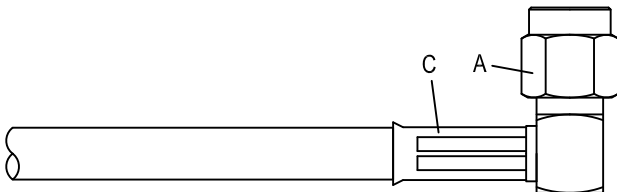
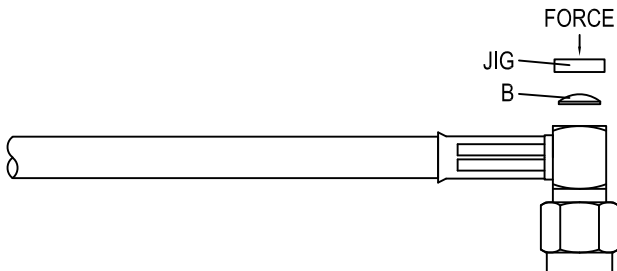
**Notice: JYEBAO reserves the right to make modifications deemed appropriate.**

| SMA                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SMA3100-9L200 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Interface</b><br>MIL-STD-348B<br>Mechanically compatible with 2.92 & 3.5                                                                                                                                                                                                                                                                                                                                                                              |               |
| <b>Electrical Data</b><br>Impedance 50Ω<br>Frequency range DC to 6GHz<br>VSWR $\leq 1.2$ (DC to 6GHz)<br>Insertion loss $\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB<br>Insulation resistance $\geq 5000\text{M}\Omega$<br>Contact resistance inner conductor $\leq 3\text{m}\Omega$<br>Contact resistance outer conductor $\leq 2\text{m}\Omega$<br>Dielectric withstanding voltage (at sea level) 1000 V rms<br>Working voltage (at sea level) 335 V rms |               |
| <b>Mechanical Data</b><br>Recommended coupling nut torque 4 inch lbs<br>Coupling proof torque 5.3 inch lbs<br>Coupling nut retention force $\geq 60.7$ lbs<br>Contact Captivation-axial $\geq 6.1$ lbs<br>Durability (mating) $\geq 100$                                                                                                                                                                                                                 |               |
| <b>Environmental Data</b><br>Temperature range -65°C to +165°C<br>Thermal shock MIL-STD-202, Method 107, Condition B<br>Moisture resistance MIL-STD-202, Method 106<br>Corrosion MIL-STD-202, Method 101, Condition B<br>RoHS Compliant                                                                                                                                                                                                                  |               |
| <b>Tooling</b><br>Crimping tool CRT-1 or CRT-2<br>Crimp insert INSERT-B                                                                                                                                                                                                                                                                                                                                                                                  |               |

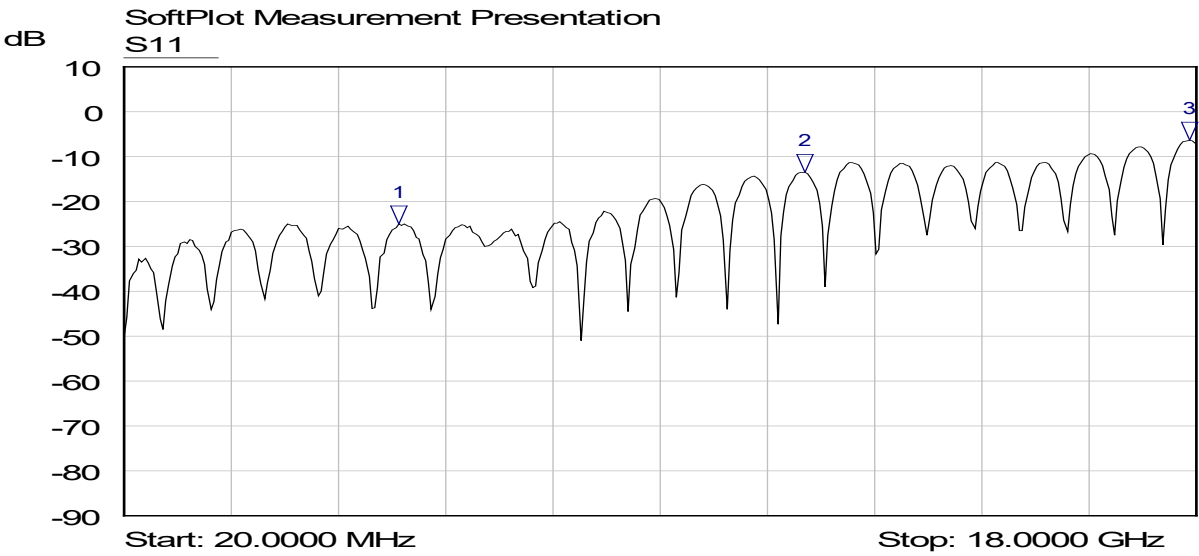
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# JYE BAO CO., LTD.

## CABLE ASSEMBLY RECOMMENDATION

|                                                                                                                                                                                                                                                                                                                                                                                                                         |  |         |                                                                                                                                                                            |         |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---|
| SMA3100-9L200                                                                                                                                                                                                                                                                                                                                                                                                           |  | DATE    | 2014/04/29                                                                                                                                                                 | REV     | — |
| <div><div><div>A</div><div></div><div>BODY</div></div><div><div>B</div><div></div><div>COVER</div></div><div><div>C</div><div></div><div>FERRULE</div></div></div> |  |         |                                                                                                                                                                            |         |   |
| DIAGRAM                                                                                                                                                                                                                                                                                                                                                                                                                 |  |         | ASSEMBLY INSTRUCTION                                                                                                                                                       |         |   |
|                                                                                                                                                                                                                                                                                                                                       |  |         | Step 1: STRIP AS SHOWN.                                                                                                                                                    |         |   |
|                                                                                                                                                                                                                                                                                                                                      |  |         | Step 2: SLIDE FERRULE " C " OVER CABLE.<br>Step 3: WRAP THE BRAIDING UPWARDS.<br>Step 4: SLIDE CENTER CONDUCTOR ON THE CONTACT PIN OF CONNECTOR " A " AND SOLDER IN " Y ". |         |   |
|                                                                                                                                                                                                                                                                                                                                      |  |         | Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP.<br>(USE 5.5mm/0.217inch HEX SECTION OF INSERT-B)                                                        |         |   |
|                                                                                                                                                                                                                                                                                                                                      |  |         | Step 6: PRESS ON THE TOP OF " B " WITH JIGS.                                                                                                                               |         |   |
| This part number complies with RoHS.<br>Notice: JYEBAO reserves the right to make modifications deemed appropriate.                                                                                                                                                                                                                                                                                                     |  |         |                                                                                                                                                                            |         |   |
| APPROVED                                                                                                                                                                                                                                                                                                                                                                                                                |  | CHECKED |                                                                                                                                                                            | DRAWING |   |
|                                                                                                                                                                                                                                                                                                                                                                                                                         |  |         |                                                                                                                                                                            | Albert  |   |

SMA3100-9L200



| Mkr | Trace | X-Axis      | Value     | Notes |
|-----|-------|-------------|-----------|-------|
| 1 ▽ | S11   | 4.6235 GHz  | -24.97 dB |       |
| 2 ▽ | S11   | 11.4286 GHz | -13.42 dB |       |
| 3 ▽ | S11   | 17.8834 GHz | -6.33 dB  |       |