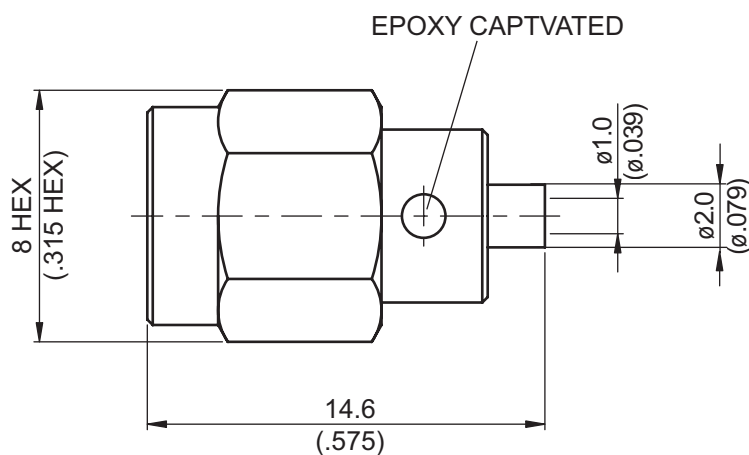


SMA33NP-0034

**SMA Plug Solder For .034 semi-rigid
18GHz VSWR 1.3**

50Ω



Parts	Material	Plating (Micro-inch)
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Stainless	Passivated

Weight: 2.98 g

Suitable Cables: Semi-rigid.034

This part number complies with RoHS.


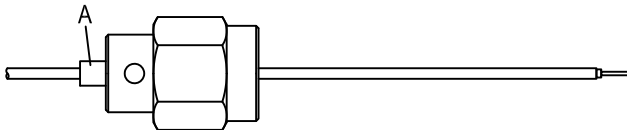
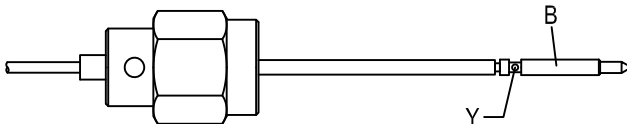
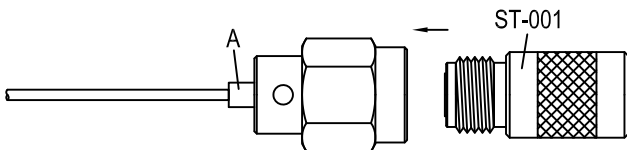
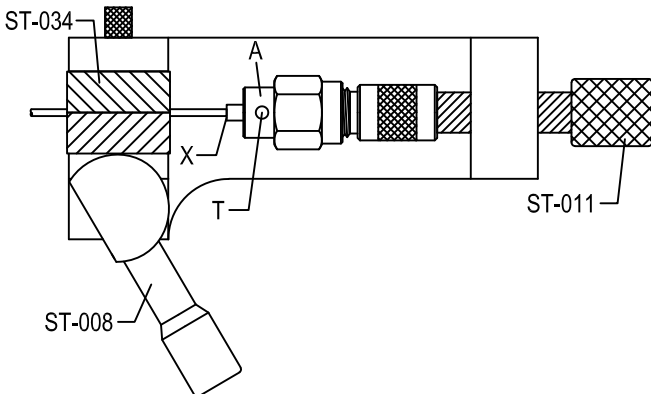
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SMA	SMA33NP-0034
Interface MIL-STD-348B Mechanically compatible with 2.92 & 3.5	
Electrical Data Impedance 50Ω Frequency range DC to 18GHz VSWR ≤ 1.3 (DC to 18GHz) Insertion loss $\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB Insulation resistance $\geq 5000\text{M}\Omega$ Contact resistance inner conductor $\leq 3\text{m}\Omega$ Contact resistance outer conductor $\leq 2\text{m}\Omega$ Dielectric withstanding voltage (at sea level) 1000 V rms Working voltage (at sea level) 335V rms	
Mechanical Data Recommended coupling nut torque 7 to 9.5 inch lbs Coupling proof torque 15 inch lbs Coupling nut retention force ≥ 60.7 lbs Contact Captivation-axial ≥ 6.1 lbs Durability (mating) ≥ 500	
Environmental Data Temperature range -40°C to +165°C Thermal shock MIL-STD-202, Method 107, Condition B Moisture resistance MIL-STD-202, Method 106 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	
Tooling Locator tool ST-001,ST-011 Soldering fixture ST-008 Insert for .034 semi-rigid cable ST-034	

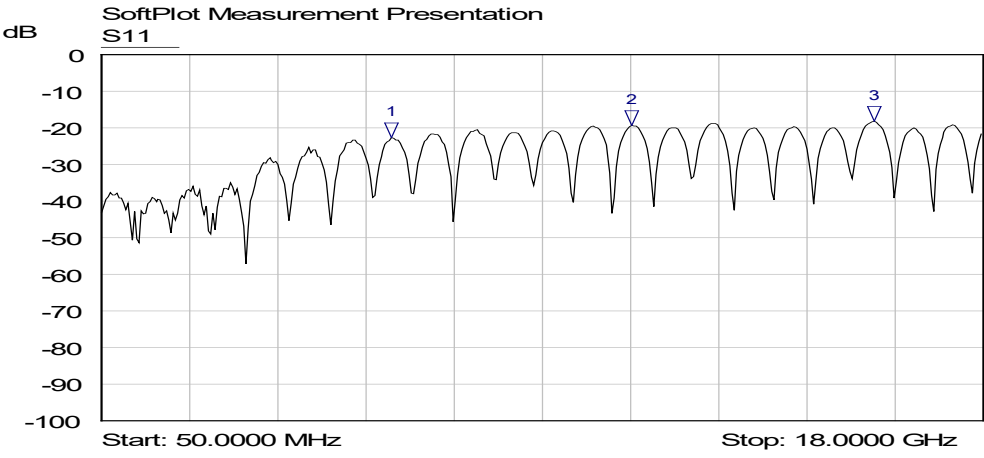
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SMA33NP-0034		DATE	2017/12/01	REV	—
A		B			
					
BODY		CONTACT PIN			
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE CONNECTOR BODY " A " OVER CABLE.			
		Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y " .			
		Step 4: INSERT PREPARED CABLE INTO CONNECTOR BODY " A ". Step 5: SCREW LOCATOR TOOL "ST-001" INTO THE CONNECTOR BODY " A " .			
		Step 6: USE SOLDERING FIXTURE " ST-008 " , INSERT TOOL " ST-034 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X " AND FILL EPOXY IN " T " .			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

SMA33NP-0034



Mkr	Trace	X-Axis	Value	Notes
1 ▾	S11	5.9603 GHz	-22.71 dB	
2 ▾	S11	10.8485 GHz	-19.42 dB	
3 ▾	S11	15.7811 GHz	-18.23 dB	