



NO.	COMPONENTS	IMPEDANCE
1	SMA FEMALE FOR BULKHEAD	50 OHM
2	.047" TIN PLATED SEMI-RIGID CABLE	50 OHM
3	SMP FEMALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/03/22	

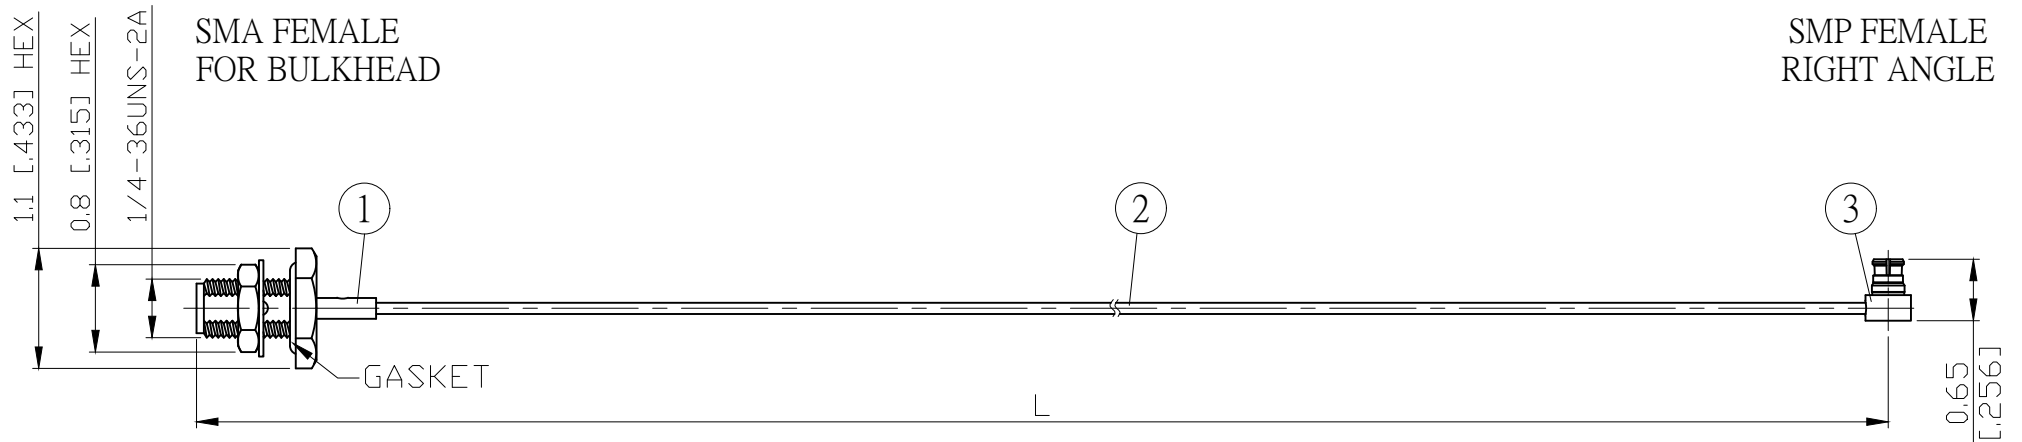

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
A85P89-47T-18GXXX	18	-16.5dB	50 (19.685)	0.491 (491.0)
			100 (39.370)	0.991 (991.0)
			150 (59.055)	1.491 (1491.0)
			200 (78.740)	1.991 (1991.0)
			CUSTOM LENGTH IN CM	- - -



					STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED			DESCRIPTION CABLE ASSEMBLY SMA JACK FOR BULKHEAD TO SMP JACK R/A	
					DRAWING			JYE BAO DRAWING NO. A85P89-47T-18GXXX	
3	SMP8300-9047	SMP JACK R/A	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
2	.047TIN-W-P-50	CABLE	SEE TABLE L1	M					
1	SMA8305-0047	SMA JACK	1	EA					
NO.	PARTS NO.	DESCRIPTION	QTY	U/M	DATE		DATE		

Albert