



NO.	COMPONENTS	IMPEDANCE
1	SMA FEMALE FOR BULKHEAD	50 OHM
2	.085" HANDBENDABLE CABLE (= JYEBAO P/N .085SRF-W-P-50)	50 OHM
3	SMPM FEMALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2022/04/12	

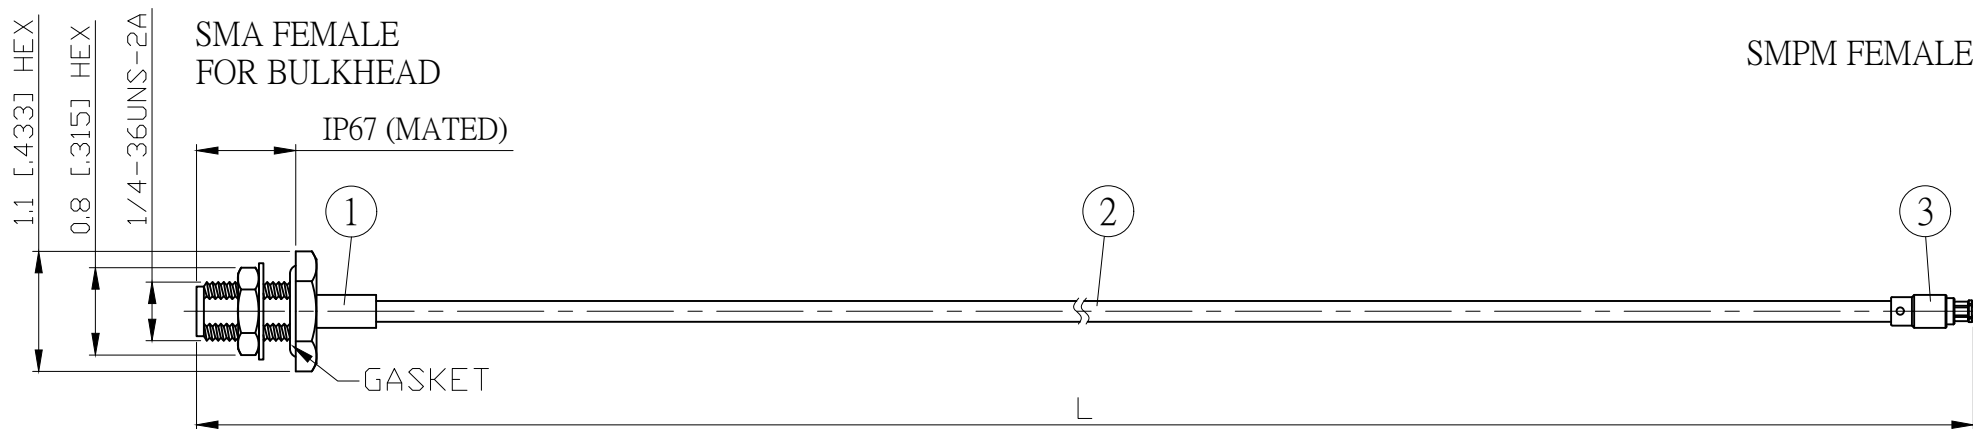

JYE BAO P/N	Freq. (GHz)	Max. Return Loss	L CM (INCH)	L1 M (MM)
A85PM80-85S-18GXXX	18	-16.5dB	50 (19.685)	0.490 (489.5)
			100 (39.370)	0.990 (989.5)
			150 (59.055)	1.490 (1489.5)
			200 (78.740)	1.990 (1989.5)
			CUSTOM LENGTH IN CM	- - -



NO.	PARTS NO.	DESCRIPTION	QTY	U/M	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	STANDARD	REV -	UNIT CM(INCH)	JYE BAO CO., LTD.
3	SMPM8300-0085	SMPM JACK	1	EA		APPROVED		DATE	TAIPEI TAIWAN
2	.085SRF-W-P-50	CABLE	SEE TABLE L1	M		CHECKED		DATE	DESCRIPTION CABLE ASSEMBLY SMA JACK FOR BULKHEAD TO SMPM JACK
1	SMA8305-0085	SMA JACK	1	EA		DRAWING	<i>Albert</i>	DATE	JYE BAO DRAWING NO. A85PM80-85S-18GXXX