



NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY FEMALE FOR BULKHEAD	50 OHM
2	RG223	50 OHM
3	HEAT SHRINKING TUBE	
4	BNC REVERSE POLARITY MALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2012/08/15	
A	修正SMA螺紋規格	2013/10/01	

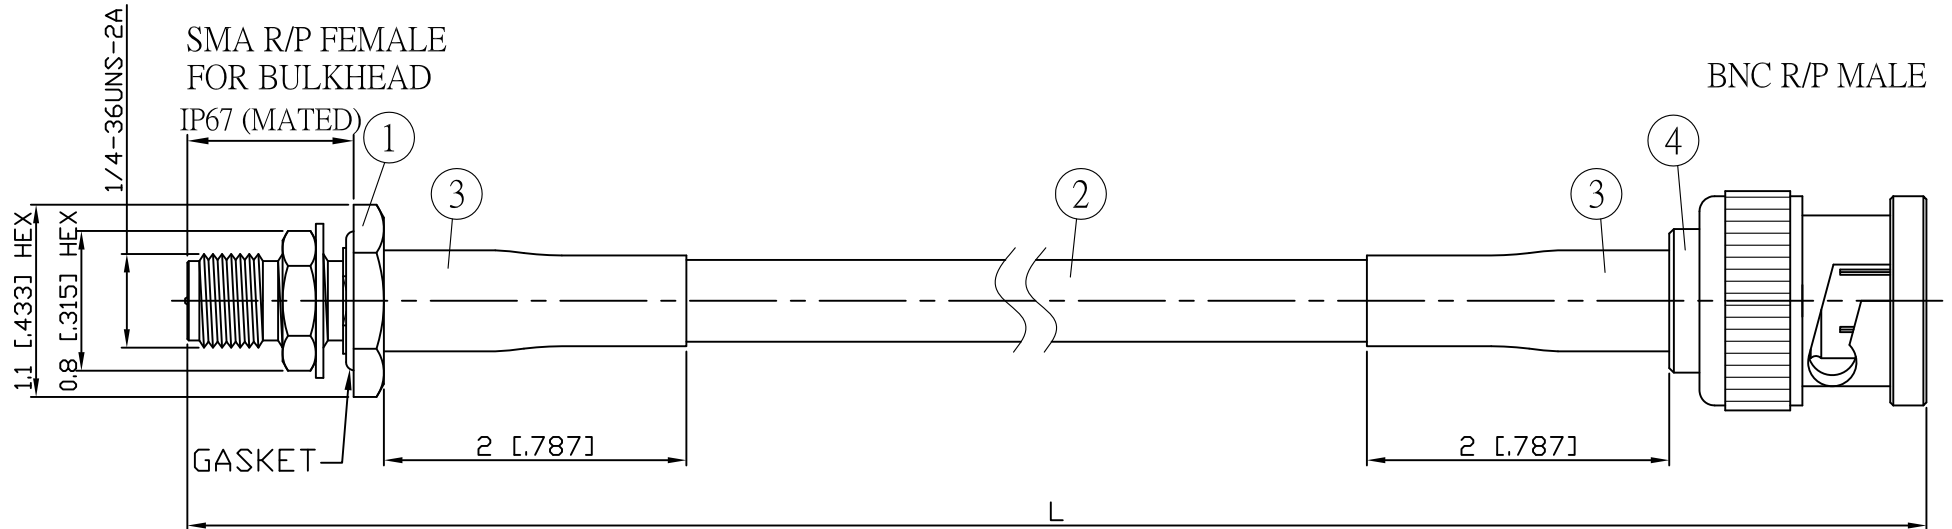

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A95B60-223-15	15 (5.906)	0.443 (135.0)
A95B60-223-30	30 (11.811)	0.915 (279.0)
A95B60-223-50	50 (19.685)	1.572 (479.0)
A95B60-223-100	100 (39.370)	3.212 (979.0)
A95B60-223-150	150 (59.055)	4.852 (1479.0)
A95B60-223-200	200 (78.740)	6.493 (1979.0)
A95B60-223-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

					STANDARD	REV A	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED			DESCRIPTION CABLE ASSEMBLY SMA R/P JACK FOR BULKHEAD TO BNC R/P PLUG	
					DRAWING			JYE BAO DRAWING NO.	
					Albert			A95B60-223-XXX	
4	BNC6100-0223	BNC R/P PLUG	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
3	G5(F)-8.0MM-BLACK	TUBE	0.04	M					
2	RG223	CABLE	L1 (SEE TABLE)	FT					
1	SMA9105-0223	SMA R/P JACK	1	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					