



NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY FEMALE FOR BULKHEAD	50 OHM
2	.141" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG402)	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	
A	修正SMA螺紋規格	2013/10/01	

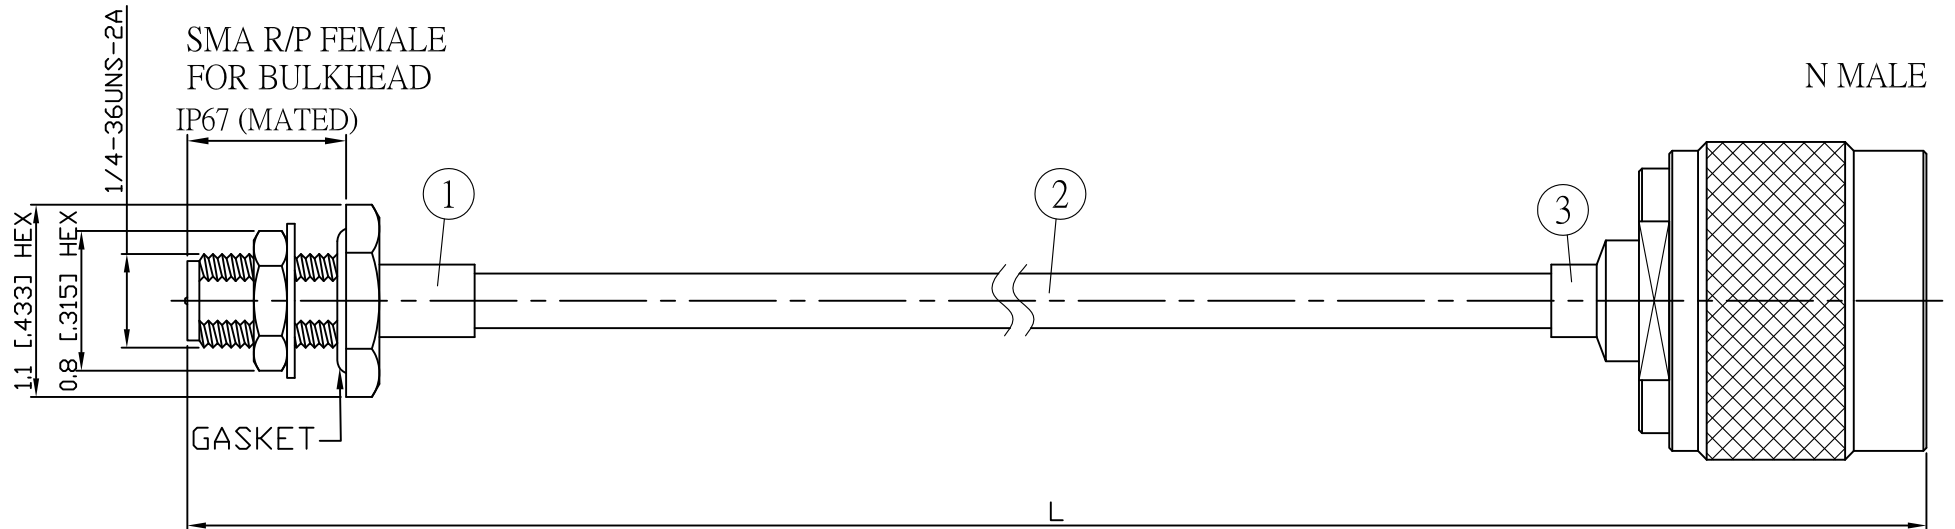

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A95N30-141T-15	15 (5.906)	0.427 (130.0)
A95N30-141T-30	30 (11.811)	0.919 (280.0)
A95N30-141T-50	50 (19.685)	1.575 (480.0)
A95N30-141T-100	100 (39.370)	3.215 (980.0)
A95N30-141T-150	150 (59.055)	4.856 (1480.0)
A95N30-141T-200	200 (78.740)	6.496 (1980.0)
A95N30-141T-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

				STANDARD	REV A	UNIT CM(INCH)	JYE BAO CO., LTD.	
				APPROVED			TAIPEI TAIWAN	
				CHECKED			DESCRIPTION CABLE ASSEMBLY SMA R/P JACK FOR BULKHEAD TO N PLUG	
				DRAWING			JYE BAO DRAWING NO.	
				Albert			A95N30-141T-XXX	
3	N3300-0141	N PLUG	1	EA				
2	.141TIN-W-P-50	CABLE	L1 (SEE TABLE)	FT				
1	SMA9305-0141	SMA R/P JACK	1	EA				
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M				

LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.	DATE
	DATE
	DATE
	DATE