



NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY FEMALE FOR BULKHEAD	50 OHM
2	JB Y195	50 OHM
3	HEAT SHRINKING TUBE	
4	N MALE	50 OHM

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2012/08/15	
A	N3100-0058=>N3100B-0058	2013/05/23	
B	N3100B-0058=>N3100B-L195 修正SMA螺紋規格	2013/09/27	

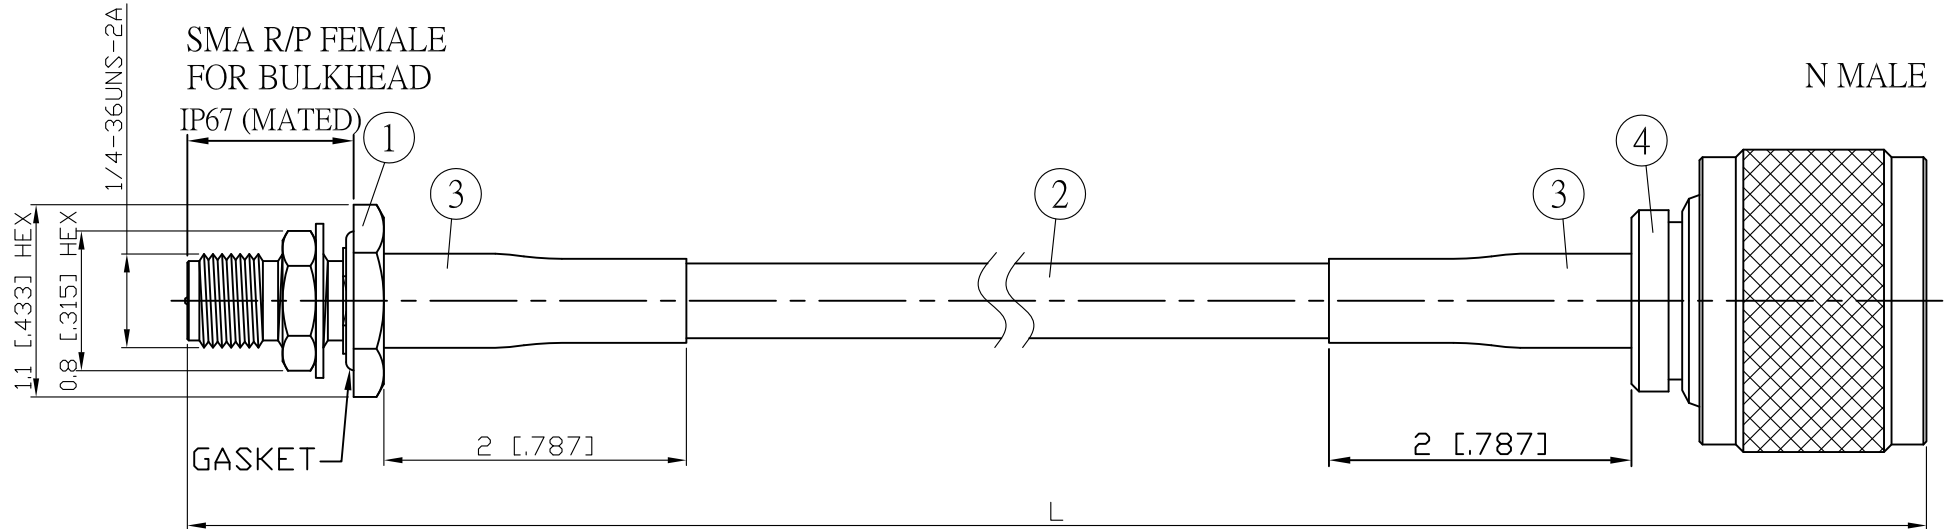

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A95N30-L195-15	15 (5.906)	0.433 (132.0)
A95N30-L195-30	30 (11.811)	0.925 (282.0)
A95N30-L195-50	50 (19.685)	1.581 (482.0)
A95N30-L195-100	100 (39.370)	3.222 (982.0)
A95N30-L195-150	150 (59.055)	4.862 (1482.0)
A95N30-L195-200	200 (78.740)	6.503 (1982.0)
A95N30-L195-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

					STANDARD	REV B	UNIT CM(INCH)	JYE BAO CO., LTD.	
					APPROVED			TAIPEI TAIWAN	
					CHECKED			DESCRIPTION	CABLE ASSEMBLY SMA R/P JACK FOR BULKHEAD TO N PLUG
					DRAWING			JYE BAO DRAWING NO.	A95N30-L195-XXX
					Albert				
4	N3100B-L195	N PLUG	1	EA	LENGTH TOLERANCE IS ±1.5% OR ±10MM, WHICHEVER IS GREATER.				
3	G5(F)-8.0MM-BLACK	TUBE	0.04	M					
2	JB Y195	CABLE	L1 (SEE TABLE)	FT					
1	SMA9105-0058	SMA R/P JACK	1	EA					
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M					