



NO.	COMPONENTS	IMPEDANCE
1	SMA REVERSE POLARITY FEMALE FOR BULKHEAD	50 OHM
2	.085" TIN PLATED SEMI-RIGID CABLE (TIN PLATED RG405)	50 OHM
3	N MALE RIGHT ANGLE	50 OHM

REVISION			
REV.	DESCRIPTON	DATE	APPROVED
-	INITIAL RELEASE	2011/03/15	
A	修正SMA螺紋規格	2013/10/01	

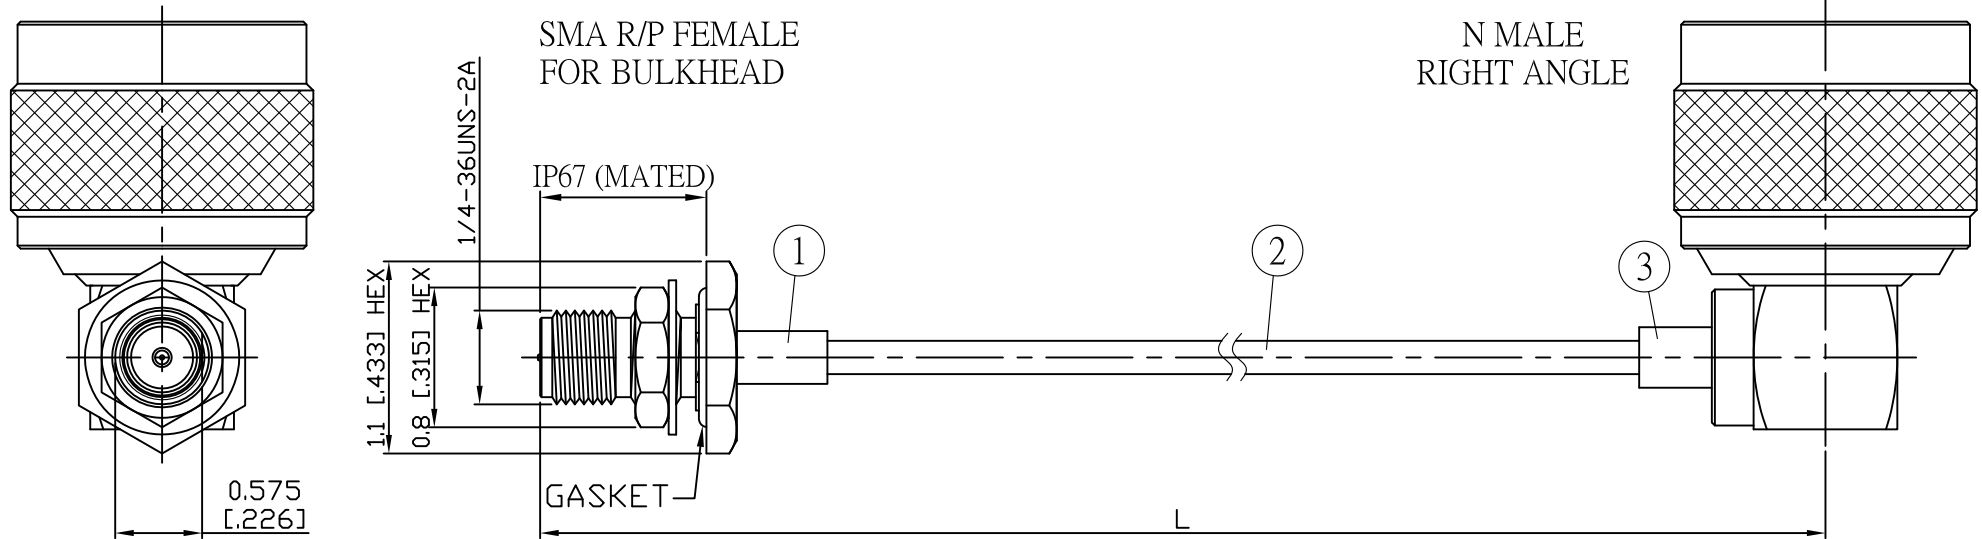

JYE BAO P/N	L CM (INCH)	L1 FT (MM)
A95N39-85T-15	15 (5.906)	0.477 (145.5)
A95N39-85T-30	30 (11.811)	0.969 (295.5)
A95N39-85T-50	50 (19.685)	1.626 (495.5)
A95N39-85T-100	100 (39.370)	3.266 (995.5)
A95N39-85T-150	150 (59.055)	4.906 (1495.5)
A95N39-85T-200	200 (78.740)	6.547 (1995.5)
A95N39-85T-XXX	CUSTOM LENGTH IN CM	- - -



MOUNTING HOLE

LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 10\text{MM}$ , WHICHEVER IS GREATER.	STANDARD	REV A	UNIT CM(INCH)	<b>JYE BAO CO., LTD.</b> TAIPEI TAIWAN
	APPROVED		DATE	
	CHECKED		DATE	DESCRIPTION CABLE ASSEMBLY SMA R/P JACK FOR BULKHEAD TO N PLUG R/A
	DRAWING Albert		DATE	JYE BAO DRAWING NO. A95N39-85T-XXX
3	N3300-9085	N PLUG R/A	1	EA
2	.085TIN-W-P-50	CABLE	L1 (SEE TABLE)	FT
1	SMA9305A-0085	SMA R/P JACK	1	EA
NO.	PARTS NO.	DESCRIPTION	Q'TY	U/M