


AD-A3A3

SMA Plug To SMA Plug
18GHz VSWR 1.2

50Ω

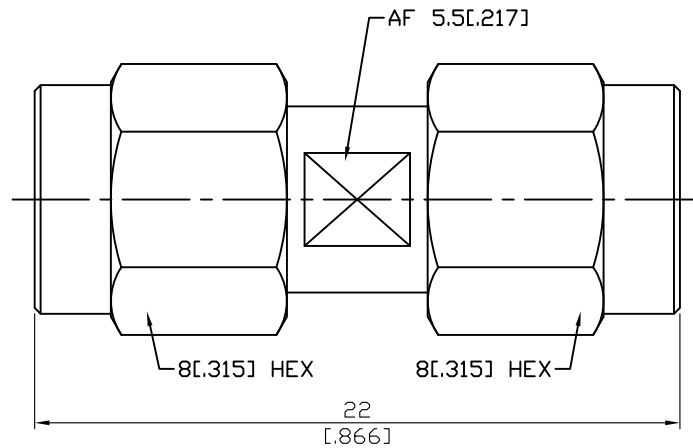

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 6.5g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A3A3	SMA Plug To SMA Plug 18GHz VSWR 1.2																
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 394">Interface</td> </tr> <tr> <td data-bbox="129 400 774 434">Standard</td> <td data-bbox="774 400 1482 434">MIL-STD-348B</td> </tr> <tr> <td data-bbox="129 445 774 479">Mechanically compatible with</td> <td data-bbox="774 445 1482 479">2.92 & 3.5</td> </tr> </table>		Interface		Standard	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5										
Interface																	
Standard	MIL-STD-348B																
Mechanically compatible with	2.92 & 3.5																
<table border="0"> <tr> <td colspan="2" data-bbox="129 602 531 654">Electrical Data</td> </tr> <tr> <td data-bbox="129 660 774 694">Impedance</td> <td data-bbox="774 660 1482 694">50Ω</td> </tr> <tr> <td data-bbox="129 705 774 739">Frequency Range</td> <td data-bbox="774 705 1482 739">DC To 18GHz</td> </tr> <tr> <td data-bbox="129 750 774 784">VSWR</td> <td data-bbox="774 750 1482 784">≤ 1.2 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="129 795 774 828">Insertion Loss</td> <td data-bbox="774 795 1482 828">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 840 774 873">Insulation Resistance</td> <td data-bbox="774 840 1482 873">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 884 774 918">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="774 884 1482 918">1500 V rms</td> </tr> <tr> <td data-bbox="129 929 774 963">Working Voltage (at sea level)</td> <td data-bbox="774 929 1482 963">500 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC To 18GHz	VSWR	≤ 1.2 (DC To 18GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC To 18GHz																
VSWR	≤ 1.2 (DC To 18GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1500 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1099 531 1151">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1158 774 1191">Recommended Coupling Nut Torque</td> <td data-bbox="774 1158 1482 1191">4 in-lbs</td> </tr> <tr> <td data-bbox="129 1202 774 1236">Coupling Proof Torque</td> <td data-bbox="774 1202 1482 1236">5.3 in-lbs</td> </tr> <tr> <td data-bbox="129 1247 774 1281">Coupling Nut Retention Force</td> <td data-bbox="774 1247 1482 1281">≥ 60.7 lbs</td> </tr> <tr> <td data-bbox="129 1292 774 1326">Contact Captivation-axial</td> <td data-bbox="774 1292 1482 1326">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1337 774 1370">Durability (mating)</td> <td data-bbox="774 1337 1482 1370">≥ 100</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	4 in-lbs	Coupling Proof Torque	5.3 in-lbs	Coupling Nut Retention Force	≥ 60.7 lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 100				
Mechanical Data																	
Recommended Coupling Nut Torque	4 in-lbs																
Coupling Proof Torque	5.3 in-lbs																
Coupling Nut Retention Force	≥ 60.7 lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 100																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1503 531 1554">Environmental Data</td> </tr> <tr> <td data-bbox="129 1561 774 1594">Temperature Range</td> <td data-bbox="774 1561 1482 1594">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1606 774 1639">Thermal Shock</td> <td data-bbox="774 1606 1482 1639">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1650 774 1684">Moisture Resistance</td> <td data-bbox="774 1650 1482 1684">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1695 774 1729">Corrosion</td> <td data-bbox="774 1695 1482 1729">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1740 774 1774">RoHS</td> <td data-bbox="774 1740 1482 1774">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

AD-A3A3

