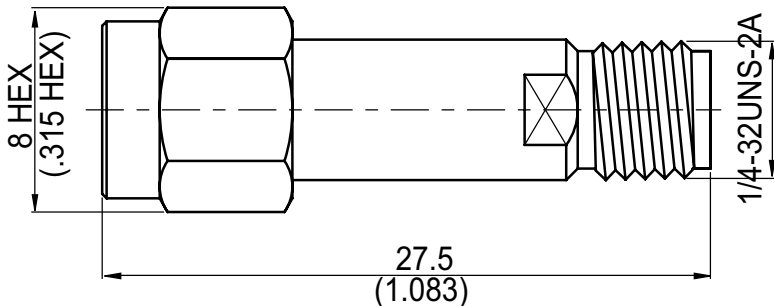


AD-A3A8-L	SMA Plug To SMA Jack 18GHz VSWR 1.2		50Ω
			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A3A8-L	SMA Plug To SMA Jack 18GHz VSWR 1.2														
Interface <table> <tr> <td>Standard</td><td>MIL-STD-348B</td></tr> <tr> <td>Mechanically compatible with</td><td>2.92 & 3.5</td></tr> </table>	Standard	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5											
Standard	MIL-STD-348B														
Mechanically compatible with	2.92 & 3.5														
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency Range</td><td>DC To 18GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC To 18GHz)</td></tr> <tr> <td>Insertion Loss</td><td>≤ 0.04 x √f(GHz) dB</td></tr> <tr> <td>Insulation Resistance</td><td>≥ 5000MΩ</td></tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td><td>1500 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>500 V rms</td></tr> </table>	Impedance	50Ω	Frequency Range	DC To 18GHz	VSWR	≤ 1.2 (DC To 18GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms	
Impedance	50Ω														
Frequency Range	DC To 18GHz														
VSWR	≤ 1.2 (DC To 18GHz)														
Insertion Loss	≤ 0.04 x √f(GHz) dB														
Insulation Resistance	≥ 5000MΩ														
Dielectric Withstanding Voltage (at sea level)	1500 V rms														
Working Voltage (at sea level)	500 V rms														
Mechanical Data <table> <tr> <td>Recommended Coupling Nut Torque</td><td>4 in-lbs</td></tr> <tr> <td>Coupling Proof Torque</td><td>5.3 in-lbs</td></tr> <tr> <td>Coupling Nut Retention Force</td><td>≥ 60.7 lbs</td></tr> <tr> <td>Contact Captivation-axial</td><td>≥ 6.1 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 100</td></tr> </table>	Recommended Coupling Nut Torque	4 in-lbs	Coupling Proof Torque	5.3 in-lbs	Coupling Nut Retention Force	≥ 60.7 lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 100					
Recommended Coupling Nut Torque	4 in-lbs														
Coupling Proof Torque	5.3 in-lbs														
Coupling Nut Retention Force	≥ 60.7 lbs														
Contact Captivation-axial	≥ 6.1 lbs														
Durability (mating)	≥ 100														
Environmental Data <table> <tr> <td>Temperature Range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal Shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture Resistance</td><td>MIL-STD-202, Method 206</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>	Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant					
Temperature Range	-65°C to +165°C														
Thermal Shock	MIL-STD-202, Method 107, Condition B														
Moisture Resistance	MIL-STD-202, Method 206														
Corrosion	MIL-STD-202, Method 101, Condition B														
RoHS	Compliant														

AD-A3A8-L

