

AD-A3S8	SMA Plug To SMB Jack 4GHz VSWR 1.2		50Ω
Parts	Material	Plating (Micro-inch)	
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Gasket	Silicon		
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Weight: 6.44 g			


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A3S8	SMA Plug To SMB Jack 4GHz VSWR 1.2																	
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> Standard Mechanically Compatible With	<table border="1"> <thead> <tr> <th data-bbox="780 344 1123 394">SMA</th> <th data-bbox="1123 344 1481 394">SMB</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1481 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 492">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1481 492">SMS</td> </tr> </tbody> </table>	SMA	SMB	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5	SMS											
SMA	SMB																	
MIL-STD-348B	MIL-STD-348B																	
2.92 & 3.5	SMS																	
<div data-bbox="129 562 531 611" style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC To 4GHz $\leq 1.2$ (DC To 4GHz) $\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB $\geq 5000\text{M}\Omega$ 1000 V rms 335 V rms																	
<div data-bbox="129 1059 531 1108" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	<table border="1"> <thead> <tr> <th data-bbox="780 1108 1123 1158">SMA</th> <th data-bbox="1123 1108 1481 1158">SMB</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1158 1123 1207">4 in-lbs</td> <td data-bbox="1123 1158 1481 1207">NA</td> </tr> <tr> <td data-bbox="780 1207 1123 1256">5.3 in-lbs</td> <td data-bbox="1123 1207 1481 1256">NA</td> </tr> <tr> <td data-bbox="780 1256 1123 1305"><math>\geq 60.7</math> lbs</td> <td data-bbox="1123 1256 1481 1305">NA</td> </tr> <tr> <td data-bbox="780 1305 1123 1355">NA</td> <td data-bbox="1123 1305 1481 1355">1.8 to 14.2 lbs</td> </tr> <tr> <td data-bbox="780 1355 1123 1404">NA</td> <td data-bbox="1123 1355 1481 1404">1.8 to 14.2 lbs</td> </tr> <tr> <td data-bbox="780 1404 1123 1453"><math>\geq 6.1</math> lbs</td> <td data-bbox="1123 1404 1481 1453"><math>\geq 4</math> lbs</td> </tr> <tr> <td data-bbox="780 1453 1123 1503"><math>\geq 100</math></td> <td data-bbox="1123 1453 1481 1503"><math>\geq 500</math></td> </tr> </tbody> </table>		SMA	SMB	4 in-lbs	NA	5.3 in-lbs	NA	$\geq 60.7$ lbs	NA	NA	1.8 to 14.2 lbs	NA	1.8 to 14.2 lbs	$\geq 6.1$ lbs	$\geq 4$ lbs	$\geq 100$	$\geq 500$
SMA	SMB																	
4 in-lbs	NA																	
5.3 in-lbs	NA																	
$\geq 60.7$ lbs	NA																	
NA	1.8 to 14.2 lbs																	
NA	1.8 to 14.2 lbs																	
$\geq 6.1$ lbs	$\geq 4$ lbs																	
$\geq 100$	$\geq 500$																	
<div data-bbox="129 1603 531 1653" style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant																	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-A3S8 (+AD-A8S3)

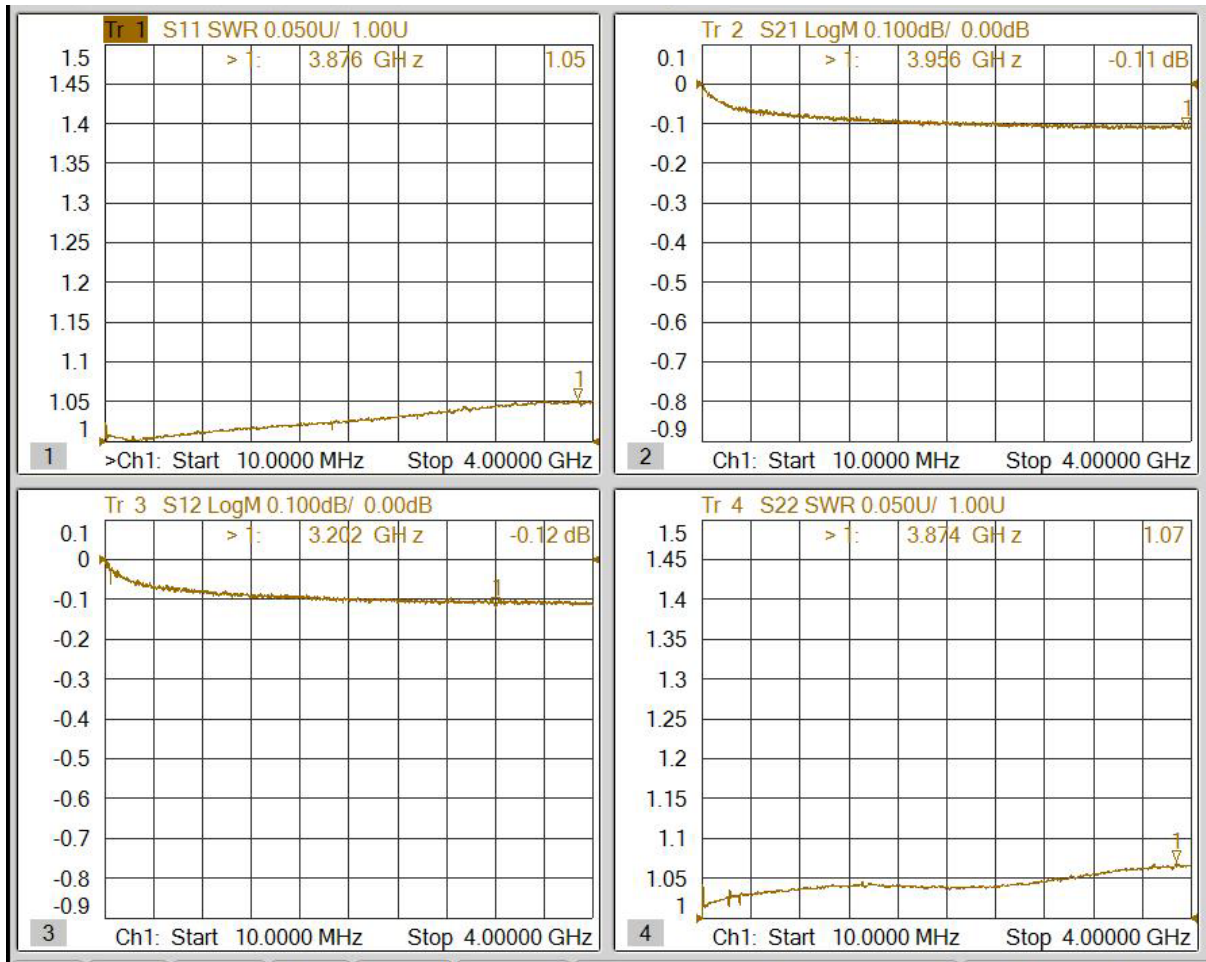

Notes:

1. IL of AD-A8S3+AD-A3S8 measured
2.  $IL/2 = IL$  of AD-A3S8