


AD-A3SA8	SMA Plug To SSMA Jack 18GHz VSWR 1.2	50Ω																					
																							
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Retainer Ring</td> <td>Beryllium Copper</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20		
Parts	Material	Plating (Micro-inch)																					
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Gasket	Silicon																						
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Insulator	Teflon																						
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
<p>This part number complies with RoHS.            Notice: JYEBAO reserves the right to make modifications deemed appropriate.</p>																							

AD-A3SA8		SMA Plug To SSMA Jack 18GHz VSWR 1.2	
<b>Interface</b>		SMA	SSMA
Standard		MIL-STD-348B	MIL-STD-348B
Mechanically Compatible With		2.92 & 3.5	
<b>Electrical Data</b>			
Impedance	50Ω		
Frequency Range	DC To 18GHz		
VSWR	≤ 1.2 (DC To 18GHz)		
Insertion Loss	≤ 0.03 x √f(GHz) dB		
Insulation Resistance	≥ 5000MΩ		
Dielectric Withstanding Voltage (at sea level)	750 V rms		
Working Voltage (at sea level)	250 V rms		
<b>Mechanical Data</b>			
	SMA	SSMA	
Recommended Coupling Nut Torque	4 in-lbs	4 in-lbs	
Coupling Proof Torque	5.3 in-lbs	5 in-lbs	
Coupling Nut Retention Force	≥ 60.7 lbs	NA	
Contact Captivation-axial	≥ 6.1 lbs	≥ 5 lbs	
Durability (mating)	≥ 100	≥ 500	
<b>Environmental Data</b>			
Temperature Range	-65°C to +165°C		
Thermal Shock	MIL-STD-202, Method 107, Condition B		
Moisture Resistance	MIL-STD-202, Method 206		
Corrosion	MIL-STD-202, Method 101, Condition B		
RoHS	Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-A3SA8

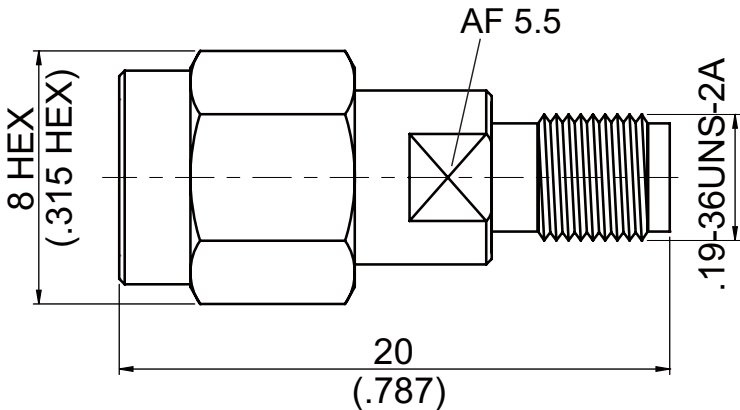