


AD-A3T9

**SMA Plug To Reverse Polarity TNC Jack** **50Ω**  
**6GHz VSWR 1.2**

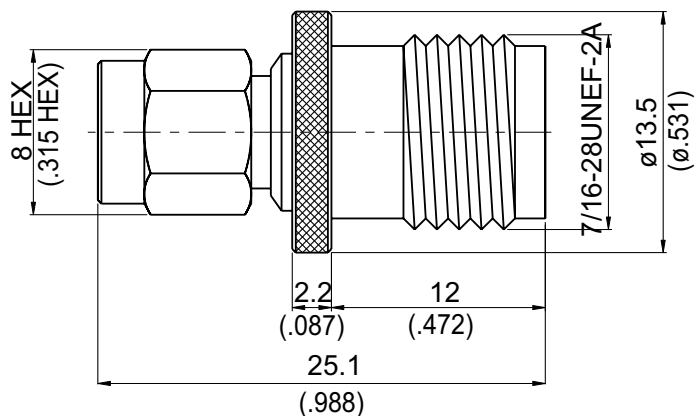

Parts	Material	Plating (Micro-inch)
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Body(TNC)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Center Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 8.97 g

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A3T9	SMA Plug To TNC Reverse Polarity Jack 6GHz VSWR 1.2																			
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p>SMA Standard Polarity Plug Side: Per MIL-STD-348B; Mechanically compatible with 2.92 &amp; 3.5</p> <p>TNC Reverse Polarity Jack Side: Per JYEBAO TNC Reverse Polarity Jack derived from MIL-STD-348B</p>																				
<div data-bbox="129 696 531 745" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Impedance</td> <td>50Ω</td> </tr> <tr> <td>Frequency Range</td> <td>DC To 6GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.2 (DC To 6GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td>≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td>1500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>500 V rms</td> </tr> </table>			Impedance	50Ω	Frequency Range	DC To 6GHz	VSWR	≤ 1.2 (DC To 6GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms				
Impedance	50Ω																			
Frequency Range	DC To 6GHz																			
VSWR	≤ 1.2 (DC To 6GHz)																			
Insertion Loss	≤ 0.05 x √f(GHz) dB																			
Insulation Resistance	≥ 5000MΩ																			
Dielectric Withstanding Voltage (at sea level)	1500 V rms																			
Working Voltage (at sea level)	500 V rms																			
<div data-bbox="129 1196 531 1245" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Recommended Coupling Nut Torque</td> <td style="width: 25%; text-align: center;">SMA</td> <td style="width: 25%; text-align: center;">TNC</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">4 in-lbs</td> <td style="text-align: center;">4.1 to 6.1 in-lbs</td> </tr> <tr> <td>Coupling Nut Retention Force</td> <td style="text-align: center;">5.3 in-lbs</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 60.7 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 6.1 lbs</td> <td style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td></td> <td style="text-align: center;">≥ 100</td> <td style="text-align: center;">≥ 500</td> </tr> </table>	Recommended Coupling Nut Torque	SMA	TNC	Coupling Proof Torque	4 in-lbs	4.1 to 6.1 in-lbs	Coupling Nut Retention Force	5.3 in-lbs	15 in-lbs	Contact Captivation-axial	≥ 60.7 lbs	NA	Durability (mating)	≥ 6.1 lbs	≥ 6.1 lbs		≥ 100	≥ 500		
Recommended Coupling Nut Torque	SMA	TNC																		
Coupling Proof Torque	4 in-lbs	4.1 to 6.1 in-lbs																		
Coupling Nut Retention Force	5.3 in-lbs	15 in-lbs																		
Contact Captivation-axial	≥ 60.7 lbs	NA																		
Durability (mating)	≥ 6.1 lbs	≥ 6.1 lbs																		
	≥ 100	≥ 500																		
<div data-bbox="129 1597 531 1646" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Temperature Range</td> <td>-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td>MIL-STD-202, Method</td> </tr> <tr> <td>Moisture Resistance</td> <td>MIL-STD-202, Method</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table>			Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method	Moisture Resistance	MIL-STD-202, Method	Corrosion	MIL-STD-202, Method	RoHS	Compliant								
Temperature Range	-65°C to +165°C																			
Thermal Shock	MIL-STD-202, Method																			
Moisture Resistance	MIL-STD-202, Method																			
Corrosion	MIL-STD-202, Method																			
RoHS	Compliant																			