


AD-A6FME3	SMA Reverse Polarity Plug to FME Plug 1GHz VSWR 1.25	50Ω
-----------	---	-----

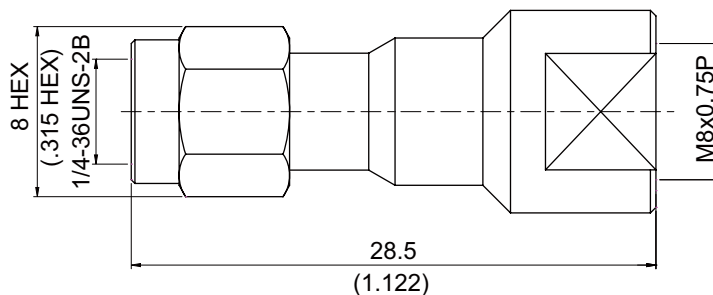

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A6FME3	SMA Reverse Polarity Plug to FME Plug 1GHz VSWR 1.25																			
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p>SMA Reverse Polarity Plug Side Per JYEBAO SMA Reverse Polarity Plug derived from MIL-STD-348B</p> <p>FME Side Per Jyebao FME series</p>																				
<div data-bbox="129 698 531 748" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Impedance</td> <td style="width: 50%;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td>DC To 1GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.25 (DC To 1GHz)</td> </tr> <tr> <td>Insulation Resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td>1000 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>500 V rms</td> </tr> </table>			Impedance	50Ω	Frequency Range	DC To 1GHz	VSWR	≤ 1.25 (DC To 1GHz)	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1000 V rms	Working Voltage (at sea level)	500 V rms						
Impedance	50Ω																			
Frequency Range	DC To 1GHz																			
VSWR	≤ 1.25 (DC To 1GHz)																			
Insulation Resistance	≥ 5000MΩ																			
Dielectric Withstanding Voltage (at sea level)	1000 V rms																			
Working Voltage (at sea level)	500 V rms																			
<div data-bbox="129 1146 531 1196" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="0" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center; border-bottom: 1px solid black;">SMA</th> <th style="width: 25%; text-align: center; border-bottom: 1px solid black;">FME</th> </tr> </thead> <tbody> <tr> <td style="border-right: 1px solid black;">Recommended Coupling Nut Torque</td> <td style="text-align: center; border-right: 1px solid black;">4 in-lbs</td> <td style="text-align: center;">≤ 17 in-lbs</td> </tr> <tr> <td style="border-right: 1px solid black;">Coupling Proof Torque</td> <td style="text-align: center; border-right: 1px solid black;">5.3 in-lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td style="border-right: 1px solid black;">Coupling Nut Retention Force</td> <td style="text-align: center; border-right: 1px solid black;">≥ 60.7 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td style="border-right: 1px solid black;">Contact Captivation-axial</td> <td style="text-align: center; border-right: 1px solid black;">≥ 6.1 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td style="border-right: 1px solid black;">Durability (mating)</td> <td style="text-align: center; border-right: 1px solid black;">≥ 100</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>				SMA	FME	Recommended Coupling Nut Torque	4 in-lbs	≤ 17 in-lbs	Coupling Proof Torque	5.3 in-lbs	NA	Coupling Nut Retention Force	≥ 60.7 lbs	NA	Contact Captivation-axial	≥ 6.1 lbs	NA	Durability (mating)	≥ 100	≥ 500
	SMA	FME																		
Recommended Coupling Nut Torque	4 in-lbs	≤ 17 in-lbs																		
Coupling Proof Torque	5.3 in-lbs	NA																		
Coupling Nut Retention Force	≥ 60.7 lbs	NA																		
Contact Captivation-axial	≥ 6.1 lbs	NA																		
Durability (mating)	≥ 100	≥ 500																		
<div data-bbox="129 1657 531 1706" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Temperature Range</td> <td style="width: 50%;">-55°C to +125°C</td> </tr> <tr> <td>Thermal Shock</td> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </table>			Temperature Range	-55°C to +125°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature Range	-55°C to +125°C																			
Thermal Shock	MIL-STD-202, Method 107, Condition B																			
Moisture Resistance	MIL-STD-202, Method 206																			
Corrosion	MIL-STD-202, Method 101, Condition B																			
RoHS	Compliant																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.