


AD-A8F3

SMA Jack 50ohm To F Plug 75ohm
(Impedance Mismatch)

50 & 75Ω

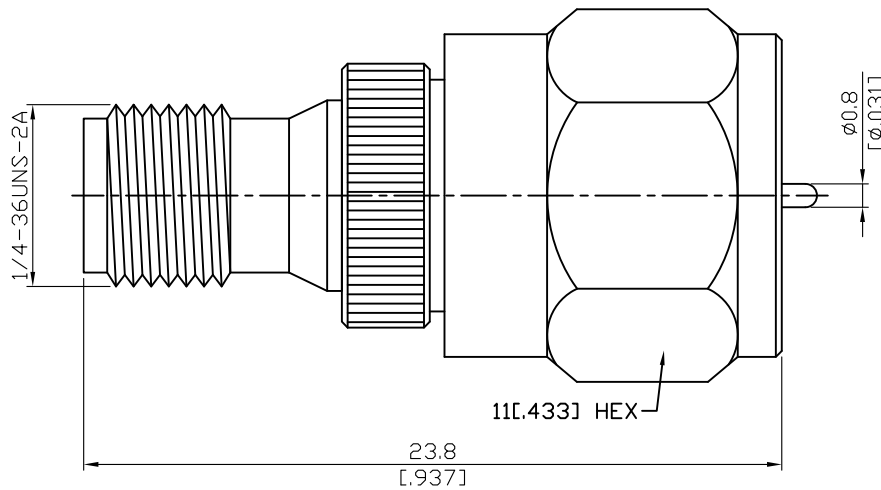

Note:
Impedance mismatch will cause poor rf performance

Parts	Material	Plating (Micro-inch)
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body (F)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body (SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8F3	SMA Jack 50ohm To F Plug 75ohm (Impedance Mismatch)											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">F</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>IEC 61169-24</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	F	MIL-STD-348B	IEC 61169-24	2.92 & 3.5						
SMA	F											
MIL-STD-348B	IEC 61169-24											
2.92 & 3.5												
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω (SMA) & 75Ω (F) DC To 3GHz Poor (impedance mismatch) ≥ 5000MΩ 1500 V rms 500 V rms											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">F</th> </tr> </thead> <tbody> <tr> <td>4 in-lbs</td> <td>15 to 20 in-lbs</td> </tr> <tr> <td>5.3 in-lbs</td> <td>60 in-lbs</td> </tr> <tr> <td>≥ 6.1 lbs</td> <td>NA</td> </tr> <tr> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>		SMA	F	4 in-lbs	15 to 20 in-lbs	5.3 in-lbs	60 in-lbs	≥ 6.1 lbs	NA	≥ 100	≥ 500
SMA	F											
4 in-lbs	15 to 20 in-lbs											
5.3 in-lbs	60 in-lbs											
≥ 6.1 lbs	NA											
≥ 100	≥ 500											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant											

Notice: JYEBAO reserves the right to make modifications deemed appropriate.