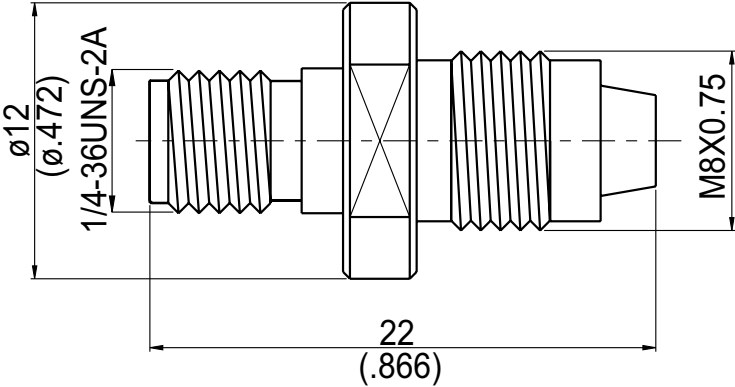


AD-A8FME8	SMA Jack To FME Jack 1GHz VSWR 1.25	50Ω												
														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 65%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Weight: 4.69 g														


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8FME8	SMA Jack To FME Jack 1GHz VSWR 1.25																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">FME</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>Jyebao FME series</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	FME	MIL-STD-348B	Jyebao FME series	2.92 & 3.5														
SMA	FME																			
MIL-STD-348B	Jyebao FME series																			
2.92 & 3.5																				
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2">DC To 1GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2">≤ 1.25 (DC To 1GHz)</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2">1000 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2">500 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 1GHz		VSWR	≤ 1.25 (DC To 1GHz)		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1000 V rms		Working Voltage (at sea level)	500 V rms	
Impedance	50Ω																			
Frequency Range	DC To 1GHz																			
VSWR	≤ 1.25 (DC To 1GHz)																			
Insulation Resistance	≥ 5000MΩ																			
Dielectric Withstanding Voltage (at sea level)	1000 V rms																			
Working Voltage (at sea level)	500 V rms																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">SMA</th> <th style="width: 25%;">FME</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>4 in-lbs</td> <td>≤ 17 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>Contact Captivation-axial</td> <td>≥ 6.1 lbs</td> <td>NA</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>			SMA	FME	Recommended Coupling Nut Torque	4 in-lbs	≤ 17 in-lbs	Coupling Proof Torque	5.3 in-lbs	NA	Contact Captivation-axial	≥ 6.1 lbs	NA	Durability (mating)	≥ 100	≥ 500			
	SMA	FME																		
Recommended Coupling Nut Torque	4 in-lbs	≤ 17 in-lbs																		
Coupling Proof Torque	5.3 in-lbs	NA																		
Contact Captivation-axial	≥ 6.1 lbs	NA																		
Durability (mating)	≥ 100	≥ 500																		
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2">-55°C to +125°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2">Compliant</td> </tr> </tbody> </table>		Temperature Range	-55°C to +125°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant				
Temperature Range	-55°C to +125°C																			
Thermal Shock	MIL-STD-202, Method 107, Condition B																			
Moisture Resistance	MIL-STD-202, Method 206																			
Corrosion	MIL-STD-202, Method 101, Condition B																			
RoHS	Compliant																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8FME8 (+AD-A3FME3)

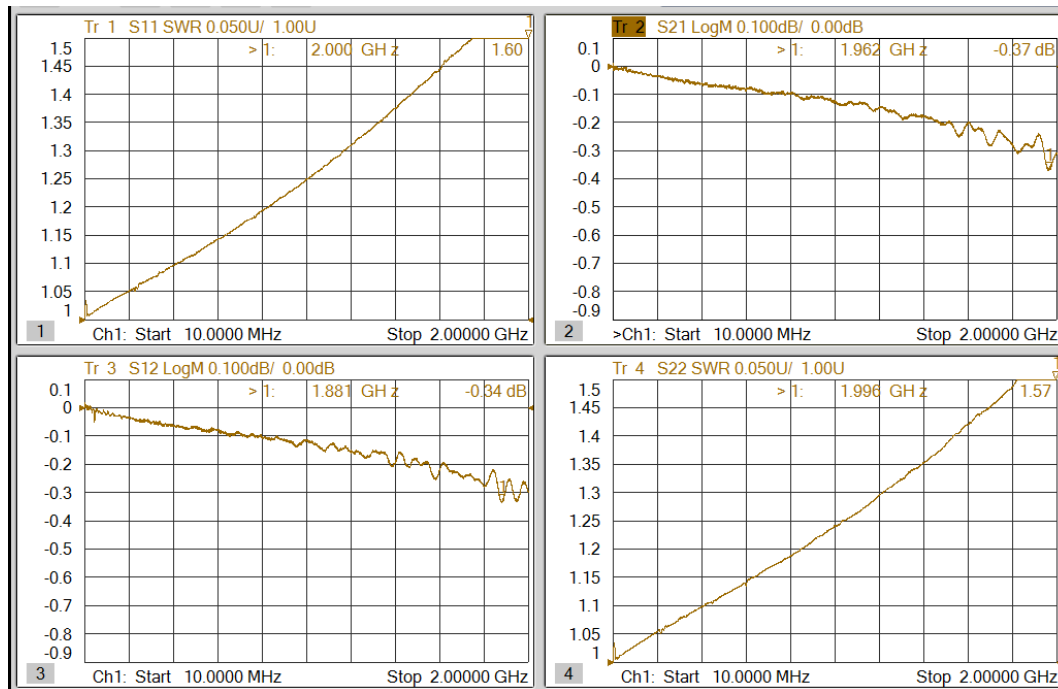

Notes:

1. IL of AD-A3FME3+AD-A8FME8 measured
2. $IL/2 = IL$ of AD-A8FME8