


AD-A8IP3	SMA Jack to IPEX MHF Plug 6GHz VSWR 1.2	50Ω																		
 Intermatable with IPEX "MHF" series HIROSE "UFL" series TYCO "UMCC" series A 1/4-36UNS-2A 13.8 (.543)																				
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Renber Ring</td><td>Beryllium Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Contact Pin</td><td>Beryllium Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body (IPEX)</td><td>Beryllium Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Body (SMA)</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Renber Ring	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body (IPEX)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body (SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Parts	Material	Plating (Micro-inch)																		
Renber Ring	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Insulator	Teflon																			
Body (IPEX)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
Body (SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.																				

AD-A8IP3		SMA Jack to IPEX MHF Plug 6GHz VSWR 1.2	
Interface		SMA	IPEX MHF
Standard		MIL-STD-348B	
Mechanically Compatible With		2.92 & 3.5	IPEX MHF; Hirose UFL TYCO UMCC
Electrical Data			
Impedance	50Ω		
Frequency Range	DC To 6GHz		
VSWR	≤ 1.2 (DC To 6GHz)		
Insertion Loss	≤ 0.03 x √f(GHz) dB		
Mechanical Data			
	SMA	MHF/UFL/UMCC	
Recommended Coupling Nut Torque	4 in-lbs	NA	
Coupling Proof Torque	5.3 in-lbs	NA	
Contact Captivation-axial	≥ 6.1 lbs	NA	
Durability (mating)	≥ 100	≥ 30	
Environmental Data			
Temperature Range	-40°C to +90°C		
RoHS	Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8IP3

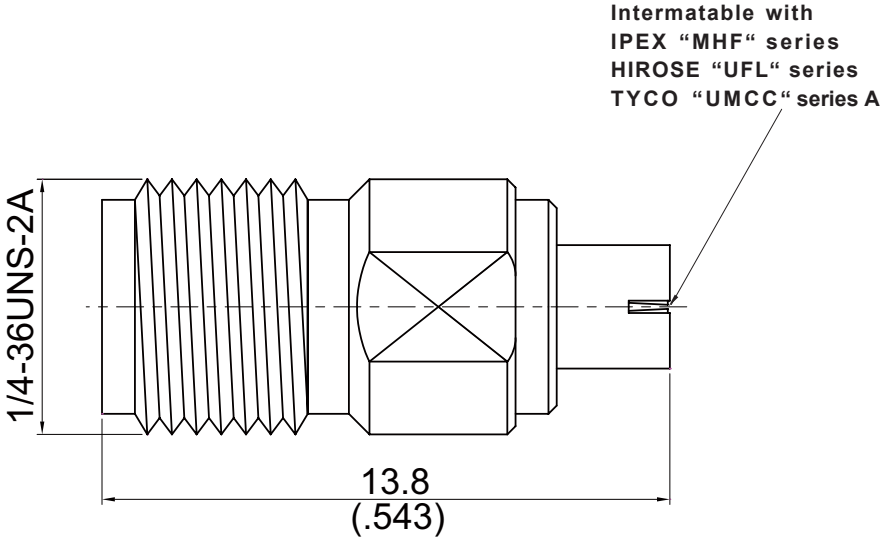