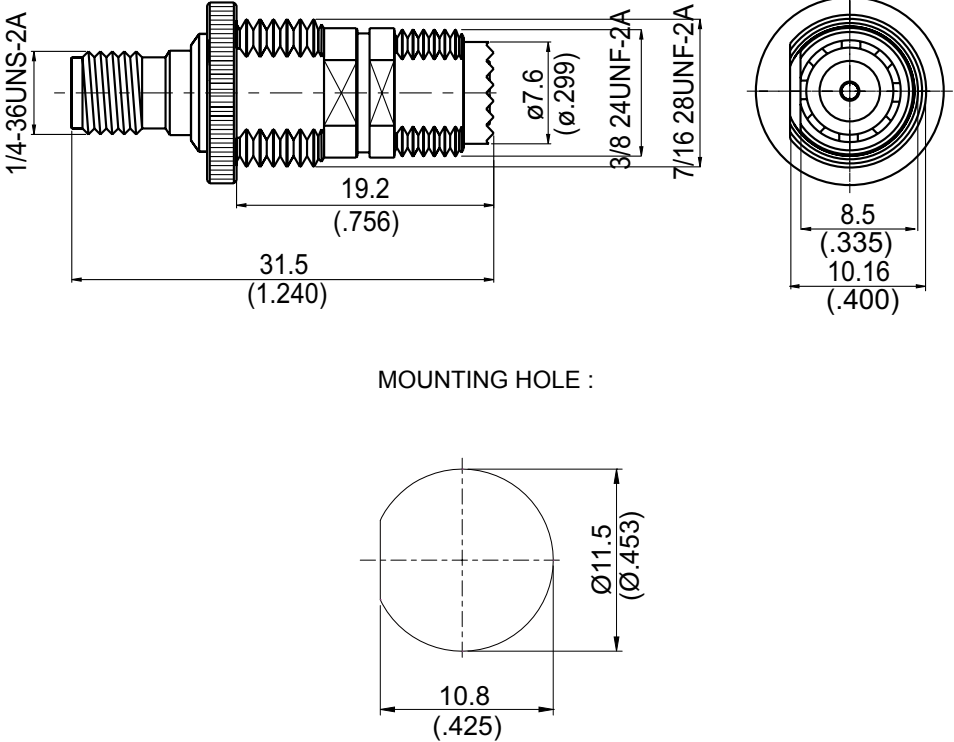


AD-A8MU8	SMA Jack To MINI UHF Jack 2.5GHz VSWR 1.2		50Ω
 <p style="text-align: center;">MOUNTING HOLE :</p>			
Parts	Material	Plating (Micro-inch)	
Body(Mini UHF)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Weight: 10.58 g			

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-A8MU8	SMA Jack To MINI UHF Jack 2.5GHz VSWR 1.2													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">Mini UHF</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>Jyebao Mini UHF</td> </tr> <tr> <td>2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	Mini UHF	MIL-STD-348B	Jyebao Mini UHF	2.92 & 3.5								
SMA	Mini UHF													
MIL-STD-348B	Jyebao Mini UHF													
2.92 & 3.5														
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;"></td> </tr> <tr> <td>DC To 2.5GHz</td> <td></td> </tr> <tr> <td>≤ 1.2 (DC To 2.5GHz)</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>1000 V rms</td> <td></td> </tr> <tr> <td>335 V rms</td> <td></td> </tr> </tbody> </table>		50Ω		DC To 2.5GHz		≤ 1.2 (DC To 2.5GHz)		≥ 5000MΩ		1000 V rms		335 V rms	
50Ω														
DC To 2.5GHz														
≤ 1.2 (DC To 2.5GHz)														
≥ 5000MΩ														
1000 V rms														
335 V rms														
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">Mini UHF</th> </tr> </thead> <tbody> <tr> <td>4 in-lbs</td> <td>NA</td> </tr> <tr> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>≥ 6.1 lbs</td> <td>≥ 4.5 lbs</td> </tr> <tr> <td>≥ 100</td> <td>≥ 500</td> </tr> </tbody> </table>		SMA	Mini UHF	4 in-lbs	NA	5.3 in-lbs	NA	≥ 6.1 lbs	≥ 4.5 lbs	≥ 100	≥ 500		
SMA	Mini UHF													
4 in-lbs	NA													
5.3 in-lbs	NA													
≥ 6.1 lbs	≥ 4.5 lbs													
≥ 100	≥ 500													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-40°C to +85°C</td> <td style="width: 50%;"></td> </tr> <tr> <td>MIL-STD-202, Method 107, Condition B</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 206</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 101, Condition B</td> <td></td> </tr> <tr> <td>Compliant</td> <td></td> </tr> </tbody> </table>		-40°C to +85°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant			
-40°C to +85°C														
MIL-STD-202, Method 107, Condition B														
MIL-STD-202, Method 206														
MIL-STD-202, Method 101, Condition B														
Compliant														

Notice: JYEBAO reserves the right to make modifications deemed appropriate.