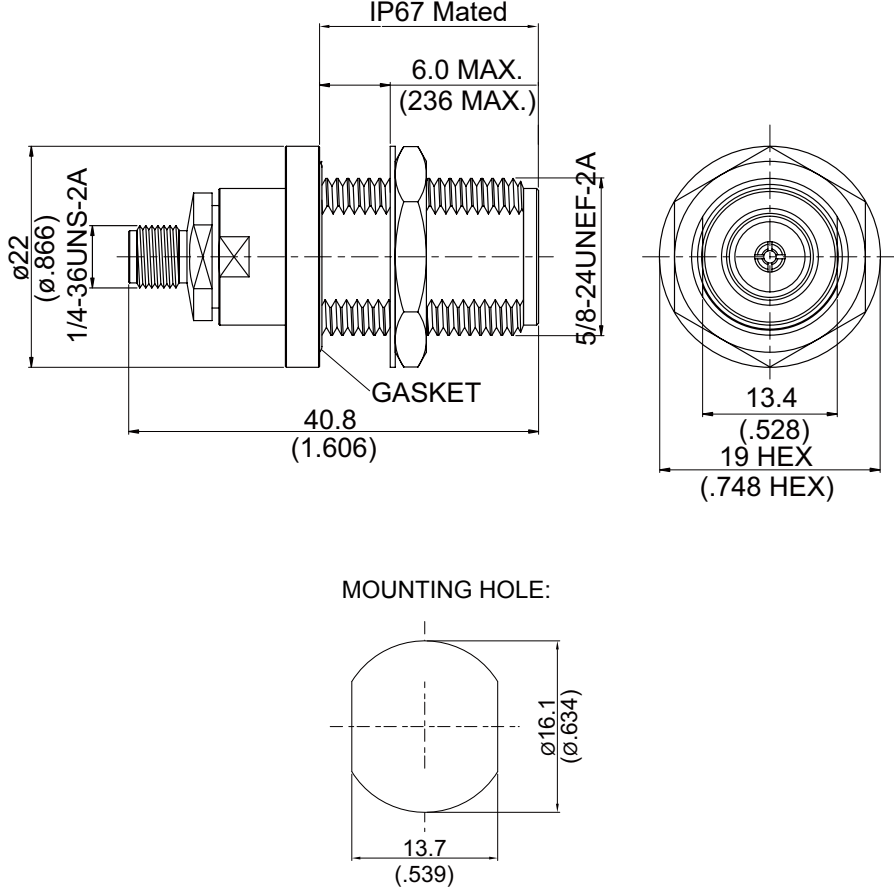


AD-A8N8-BF-18	SMA jack to N jack bulkhead IP67 mated; 18GHz VSWR1.2	50Ω																																	
 <p style="text-align: center;">MOUNTING HOLE:</p>																																			
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Hex Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Washer</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Body(N)</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Holder</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Insulator</td> <td>PPO</td> <td></td> </tr> <tr> <td>Ferrule</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Body(SMA)</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Body(N)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Holder	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Insulator	PPO		Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon			
Parts	Material	Plating (Micro-inch)																																	
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																	
Gasket	Silicon																																		
Body(N)	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																	
Holder	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																	
Insulator	PPO																																		
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																																	
Body(SMA)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																																	
Insulator	Teflon																																		
<p>Weight: 39.29 g</p>																																			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8N8-BF-18	<b>SMA jack to N jack bulkhead IP67 mated; 18GHz VSWR1.2</b>											
<b>Interface</b> Standard Mechanically compatible with	<table border="1"> <thead> <tr> <th data-bbox="780 344 1123 394">SMA</th> <th data-bbox="1123 344 1482 394">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1482 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 492">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1482 492"></td> </tr> </tbody> </table>	SMA	N	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5						
SMA	N											
MIL-STD-348B	MIL-STD-348B											
2.92 & 3.5												
<b>Electrical Data</b> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table> <tbody> <tr> <td>50Ω</td> </tr> <tr> <td>DC To 18GHz</td> </tr> <tr> <td>≤ 1.2 (DC To 18GHz)</td> </tr> <tr> <td>≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td>≥ 5000MΩ</td> </tr> <tr> <td>1500 V rms</td> </tr> <tr> <td>500 V rms</td> </tr> </tbody> </table>		50Ω	DC To 18GHz	≤ 1.2 (DC To 18GHz)	≤ 0.04 x √f(GHz) dB	≥ 5000MΩ	1500 V rms	500 V rms			
50Ω												
DC To 18GHz												
≤ 1.2 (DC To 18GHz)												
≤ 0.04 x √f(GHz) dB												
≥ 5000MΩ												
1500 V rms												
500 V rms												
<b>Mechanical Data</b> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1"> <thead> <tr> <th data-bbox="780 1160 1123 1209">SMA</th> <th data-bbox="1123 1160 1482 1209">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1209 1123 1258">4 in-lbs</td> <td data-bbox="1123 1209 1482 1258">6 to 10 in-lbs</td> </tr> <tr> <td data-bbox="780 1258 1123 1308">5.3 in-lbs</td> <td data-bbox="1123 1258 1482 1308">15 in-lbs</td> </tr> <tr> <td data-bbox="780 1308 1123 1357">≥ 6.1 lbs</td> <td data-bbox="1123 1308 1482 1357">≥ 6.3 lbs</td> </tr> <tr> <td data-bbox="780 1357 1123 1406">≥ 100</td> <td data-bbox="1123 1357 1482 1406">≥ 500</td> </tr> </tbody> </table>		SMA	N	4 in-lbs	6 to 10 in-lbs	5.3 in-lbs	15 in-lbs	≥ 6.1 lbs	≥ 6.3 lbs	≥ 100	≥ 500
SMA	N											
4 in-lbs	6 to 10 in-lbs											
5.3 in-lbs	15 in-lbs											
≥ 6.1 lbs	≥ 6.3 lbs											
≥ 100	≥ 500											
<b>Environmental Data</b> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table> <tbody> <tr> <td>-55°C to +105°C</td> </tr> <tr> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>Compliant</td> </tr> </tbody> </table>		-55°C to +105°C	MIL-STD-202, Method 107, Condition B	MIL-STD-202, Method 206	MIL-STD-202, Method 101, Condition B	Compliant					
-55°C to +105°C												
MIL-STD-202, Method 107, Condition B												
MIL-STD-202, Method 206												
MIL-STD-202, Method 101, Condition B												
Compliant												

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-A8N8-BF-18

