


AD-A8Q8	SMA Jack to QMA Jack 6GHz VSWR 1.1 & 18GHz VSWR 1.25	50Ω
---------	---------------------------------------------------------	-----

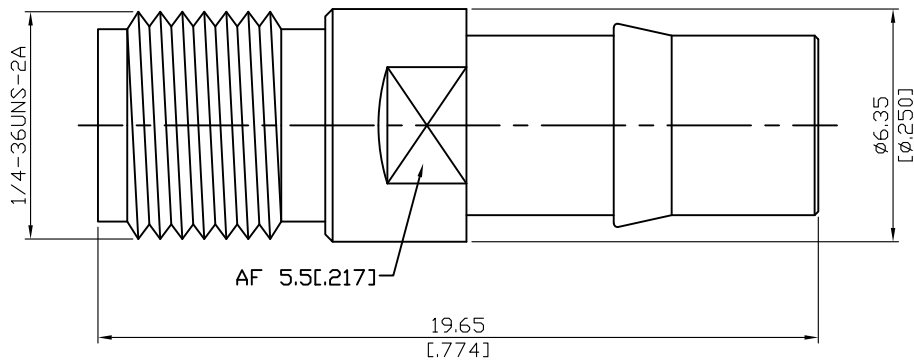

Parts	Material	Plating ( Micro-inch )
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

--	--

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-A8Q8	SMA Jack to QMA Jack 6GHz VSWR 1.1 & 18GHz VSWR 1.25																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically Compatible With	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">QMA</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>Jyebao QMA</td> </tr> <tr> <td>2.92 &amp; 3.5</td> <td></td> </tr> </tbody> </table>	SMA	QMA	MIL-STD-348B	Jyebao QMA	2.92 & 3.5																	
SMA	QMA																						
MIL-STD-348B	Jyebao QMA																						
2.92 & 3.5																							
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2">DC To 18GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2">≤ 1.1 (DC To 6GHz); ≤ 1.25 (18GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2">1000 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2">335 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 18GHz		VSWR	≤ 1.1 (DC To 6GHz); ≤ 1.25 (18GHz)		Insertion Loss	≤ 0.06 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1000 V rms		Working Voltage (at sea level)	335 V rms	
Impedance	50Ω																						
Frequency Range	DC To 18GHz																						
VSWR	≤ 1.1 (DC To 6GHz); ≤ 1.25 (18GHz)																						
Insertion Loss	≤ 0.06 x √f(GHz) dB																						
Insulation Resistance	≥ 5000MΩ																						
Dielectric Withstanding Voltage (at sea level)	1000 V rms																						
Working Voltage (at sea level)	335 V rms																						
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Engagement Force Disengagement Force (typical) Contact Captivation-axial (typical) Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">SMA</th> <th style="width: 25%;">QMA</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>4 in-lbs</td> <td>NA</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>5.3 in-lbs</td> <td>NA</td> </tr> <tr> <td>Engagement Force</td> <td>NA</td> <td>5.6 lbs</td> </tr> <tr> <td>Disengagement Force (typical)</td> <td>NA</td> <td>4.5 lbs</td> </tr> <tr> <td>Contact Captivation-axial (typical)</td> <td>≥6.1 lbs</td> <td>NA</td> </tr> <tr> <td>Durability (mating)</td> <td>≥100</td> <td>≥100</td> </tr> </tbody> </table>			SMA	QMA	Recommended Coupling Nut Torque	4 in-lbs	NA	Coupling Proof Torque	5.3 in-lbs	NA	Engagement Force	NA	5.6 lbs	Disengagement Force (typical)	NA	4.5 lbs	Contact Captivation-axial (typical)	≥6.1 lbs	NA	Durability (mating)	≥100	≥100
	SMA	QMA																					
Recommended Coupling Nut Torque	4 in-lbs	NA																					
Coupling Proof Torque	5.3 in-lbs	NA																					
Engagement Force	NA	5.6 lbs																					
Disengagement Force (typical)	NA	4.5 lbs																					
Contact Captivation-axial (typical)	≥6.1 lbs	NA																					
Durability (mating)	≥100	≥100																					
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2">-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2">Compliant</td> </tr> </tbody> </table>		Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Temperature Range	-65°C to +165°C																						
Thermal Shock	MIL-STD-202, Method 107, Condition B																						
Moisture Resistance	MIL-STD-202, Method 206																						
Corrosion	MIL-STD-202, Method 101, Condition B																						
RoHS	Compliant																						

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-A8Q8

SoftPlot Measurement Presentation  
VSWR S11

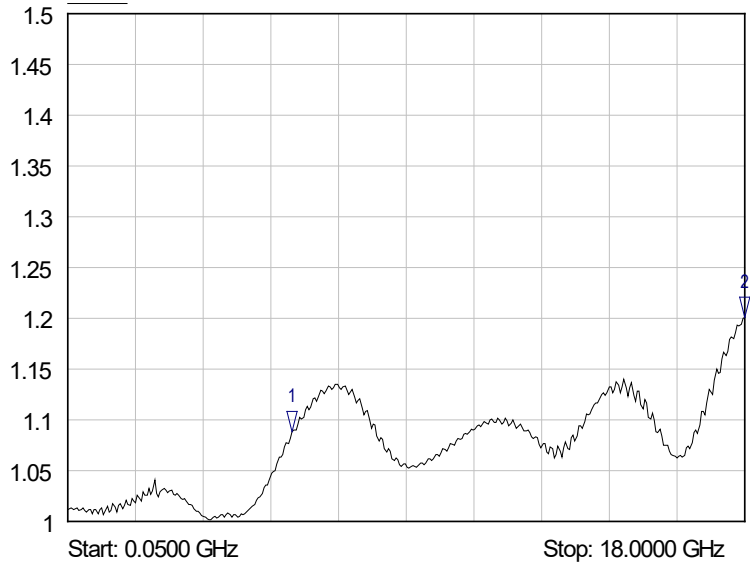

- 1 S11  
▽ 6.0000 GHz  
1.09 VSWR
- 2 S11  
▽ 18.0000 GHz  
1.20 VSWR