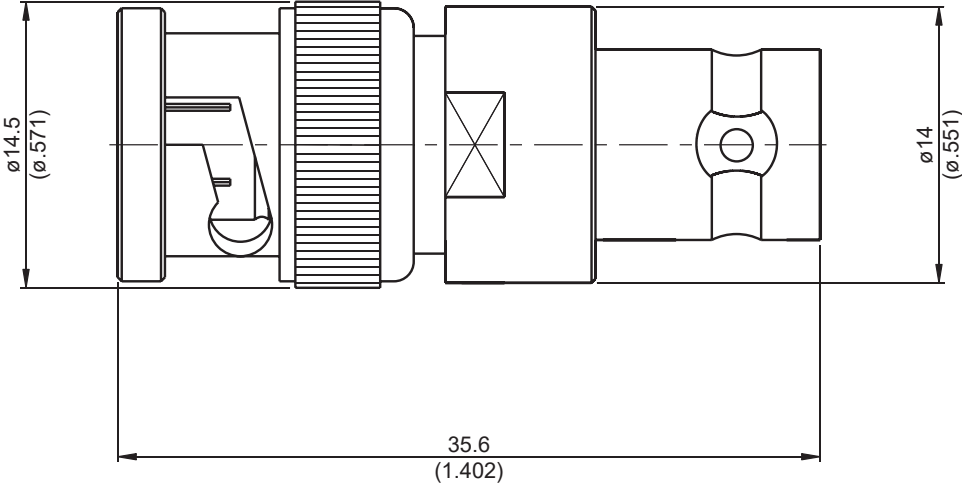


AD-B3B8A	BNC plug to BNC jack 4GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Gasket	Silicon		
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 18.98 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B3B8A	BNC plug to BNC jack 4GHz VSWR 1.2
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="129 405 264 439">Standard</p>	<p data-bbox="794 405 1011 439">MIL-STD-348B</p>
<div data-bbox="129 560 531 609" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p data-bbox="129 618 293 651">Impedance</p> <p data-bbox="129 663 389 696">Frequency Range</p> <p data-bbox="129 707 233 741">VSWR</p> <p data-bbox="129 752 333 786">Insertion Loss</p> <p data-bbox="129 797 440 831">Insulation Resistance</p> <p data-bbox="129 842 772 875">Dielectric Withstanding Voltage (at sea level)</p> <p data-bbox="129 887 563 920">Working Voltage (at sea level)</p>	<p data-bbox="794 618 858 651">50Ω</p> <p data-bbox="794 663 971 696">DC to 4GHz</p> <p data-bbox="794 707 1090 741">≤ 1.2 (DC To 4GHz)</p> <p data-bbox="794 752 1086 786">≤ 0.06 x √f(GHz) dB</p> <p data-bbox="794 797 954 831">≥ 5000MΩ</p> <p data-bbox="794 842 963 875">1500 V rms</p> <p data-bbox="794 887 946 920">500 V rms</p>
<div data-bbox="129 1057 531 1106" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p data-bbox="129 1115 657 1149">Recommended Coupling Nut Torque</p> <p data-bbox="129 1160 557 1193">Coupling Nut Retention Force</p> <p data-bbox="129 1205 491 1238">Contact Captivation-axial</p> <p data-bbox="129 1249 394 1283">Durability (mating)</p>	<p data-bbox="794 1115 1018 1149">0.6 to 2.5 in-lbs</p> <p data-bbox="794 1160 960 1193">≥ 101.2 lbs</p> <p data-bbox="794 1205 925 1238">≥ 6.1 lbs</p> <p data-bbox="794 1249 884 1283">≥ 500</p>
<div data-bbox="129 1411 531 1460" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p data-bbox="129 1469 421 1503">Temperature Range</p> <p data-bbox="129 1514 352 1547">Thermal Shock</p> <p data-bbox="129 1559 424 1592">Moisture Resistance</p> <p data-bbox="129 1603 272 1637">Corrosion</p> <p data-bbox="129 1648 220 1682">RoHS</p>	<p data-bbox="794 1469 1034 1503">-65°C to +165°C</p> <p data-bbox="794 1514 1362 1547">MIL-STD-202, Method 107, Condition B</p> <p data-bbox="794 1559 1179 1592">MIL-STD-202, Method 206</p> <p data-bbox="794 1603 1362 1637">MIL-STD-202, Method 101, Condition B</p> <p data-bbox="794 1648 946 1682">Compliant</p>

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-B3B8A

