


AD-B8F3	BNC Jack To F Plug 4GHz VSWR 1.2	75Ω
---------	-------------------------------------	-----

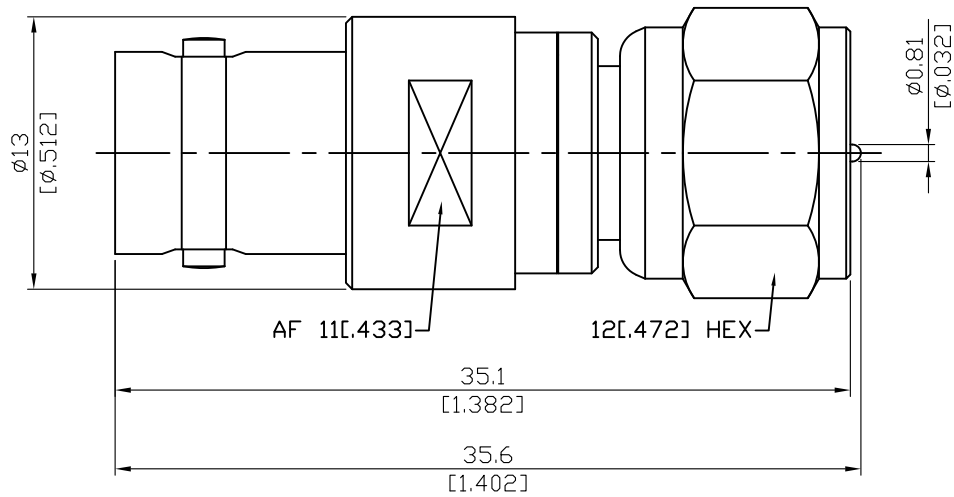

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8F3	BNC Jack To F Plug 4GHz VSWR 1.2	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard	<div style="border-top: 1px solid black; border-bottom: 1px solid black; padding: 2px 10px;">BNC</div> MIL-STD-348B	<div style="border-top: 1px solid black; border-bottom: 1px solid black; padding: 2px 10px;">F</div> IEC 61169-24
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	75Ω DC To 4GHz ≤ 1.2 (DC To 4GHz) ≥ 5000MΩ 1500 V rms 500 V rms	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<div style="border-top: 1px solid black; border-bottom: 1px solid black; padding: 2px 10px;">BNC</div> 0.6 to 2.5 in-lbs NA ≥ 6.1 lbs ≥ 500	<div style="border-top: 1px solid black; border-bottom: 1px solid black; padding: 2px 10px;">F</div> 15 to 20 in-lbs 60 in-lbs NA ≥ 500
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8F3

