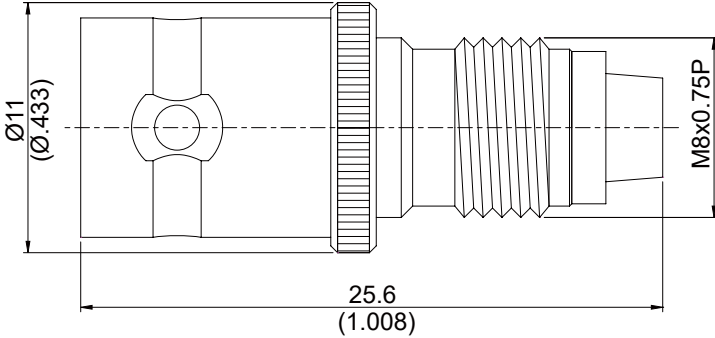


AD-B8FME8	BNC Jack To FME Jack 2GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon & POM		
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight:			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8FME8		BNC Jack To FME Jack 2GHz VSWR 1.2	
<div style="border: 1px solid black; padding: 2px;">Interface</div>		BNC	FME
Standard		MIL-STD-348B	Jyebao FME series
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div>			
Impedance	50Ω		
Frequency Range	DC To 2GHz		
VSWR	≤ 1.2 (DC To 2GHz)		
Insertion Loss	≤ 0.05 x √f(GHz) dB		
Insulation Resistance	≥ 5000MΩ		
Dielectric Withstanding Voltage (at sea level)	1000 V rms		
Working Voltage (at sea level)	500 V rms		
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div>			
	BNC	FME	
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	≤ 17 in-lbs	
Contact Captivation-axial	≥ 6.1 lbs	NA	
Durability (mating)	≥ 500	≥ 300	
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div>			
Temperature Range	-40°C to +90°C		
Thermal Shock	MIL-STD-202, Method 107, Condition B		
Moisture Resistance	MIL-STD-202, Method 206		
Corrosion	MIL-STD-202, Method 101, Condition B		
RoHS	Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.