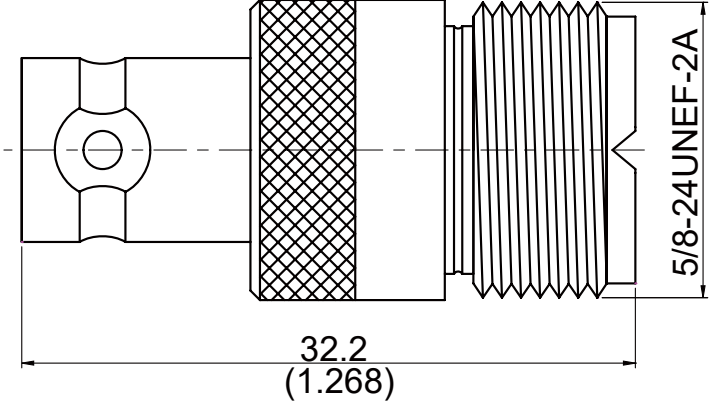


AD-B8M8	BNC Jack To UHF Jack 0.3GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 20.57 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8M8	BNC Jack To UHF Jack 0.3GHz VSWR 1.2																									
<table border="1"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td data-bbox="531 324 1123 392">BNC</td> <td data-bbox="1123 324 1482 392">UHF</td> </tr> <tr> <td data-bbox="113 392 531 510">Standard</td> <td data-bbox="531 392 1123 510">MIL-STD-348B</td> <td data-bbox="1123 392 1482 510">IEC 60169-12</td> </tr> </table>	Interface	BNC	UHF	Standard	MIL-STD-348B	IEC 60169-12																				
Interface	BNC	UHF																								
Standard	MIL-STD-348B	IEC 60169-12																								
<table border="1"> <tr> <td data-bbox="113 510 531 577">Electrical Data</td> <td colspan="2" data-bbox="531 510 1482 577"></td> </tr> <tr> <td data-bbox="113 577 531 622">Impedance</td> <td colspan="2" data-bbox="531 577 1482 622">Non Constant</td> </tr> <tr> <td data-bbox="113 622 531 667">Frequency Range</td> <td colspan="2" data-bbox="531 622 1482 667">DC To 300MHz</td> </tr> <tr> <td data-bbox="113 667 531 712">VSWR</td> <td colspan="2" data-bbox="531 667 1482 712"><math>\leq 1.2</math> (DC To 300MHz)</td> </tr> <tr> <td data-bbox="113 712 531 757">Insertion Loss</td> <td colspan="2" data-bbox="531 712 1482 757"><math>\leq 0.05 \times \sqrt{f}</math>(GHz) dB</td> </tr> <tr> <td data-bbox="113 757 531 801">Insulation Resistance</td> <td colspan="2" data-bbox="531 757 1482 801"><math>\geq 5000M\Omega</math></td> </tr> <tr> <td data-bbox="113 801 531 846">Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" data-bbox="531 801 1482 846">1500 V rms</td> </tr> <tr> <td data-bbox="113 846 531 1008">Working Voltage (at sea level)</td> <td colspan="2" data-bbox="531 846 1482 1008">750 V rms</td> </tr> </table>	Electrical Data			Impedance	Non Constant		Frequency Range	DC To 300MHz		VSWR	$\leq 1.2$ (DC To 300MHz)		Insertion Loss	$\leq 0.05 \times \sqrt{f}$ (GHz) dB		Insulation Resistance	$\geq 5000M\Omega$		Dielectric Withstanding Voltage (at sea level)	1500 V rms		Working Voltage (at sea level)	750 V rms			
Electrical Data																										
Impedance	Non Constant																									
Frequency Range	DC To 300MHz																									
VSWR	$\leq 1.2$ (DC To 300MHz)																									
Insertion Loss	$\leq 0.05 \times \sqrt{f}$ (GHz) dB																									
Insulation Resistance	$\geq 5000M\Omega$																									
Dielectric Withstanding Voltage (at sea level)	1500 V rms																									
Working Voltage (at sea level)	750 V rms																									
<table border="1"> <tr> <td data-bbox="113 1008 531 1075">Mechanical Data</td> <td colspan="2" data-bbox="531 1008 1482 1075"></td> </tr> <tr> <td data-bbox="113 1075 531 1120"></td> <td data-bbox="531 1075 1123 1120">BNC</td> <td data-bbox="1123 1075 1482 1120">UHF</td> </tr> <tr> <td data-bbox="113 1120 531 1164">Recommended Coupling Nut Torque</td> <td data-bbox="531 1120 1123 1164">0.6 to 2.5 in-lbs</td> <td data-bbox="1123 1120 1482 1164">NA</td> </tr> <tr> <td data-bbox="113 1164 531 1209">Contact Captivation-axial</td> <td data-bbox="531 1164 1123 1209"><math>\geq 6.1</math> lbs</td> <td data-bbox="1123 1164 1482 1209">NA</td> </tr> <tr> <td data-bbox="113 1209 531 1518">Durability (mating)</td> <td data-bbox="531 1209 1123 1518"><math>\geq 500</math></td> <td data-bbox="1123 1209 1482 1518">NA</td> </tr> </table>	Mechanical Data				BNC	UHF	Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	NA	Contact Captivation-axial	$\geq 6.1$ lbs	NA	Durability (mating)	$\geq 500$	NA											
Mechanical Data																										
	BNC	UHF																								
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	NA																								
Contact Captivation-axial	$\geq 6.1$ lbs	NA																								
Durability (mating)	$\geq 500$	NA																								
<table border="1"> <tr> <td data-bbox="113 1518 531 1585">Environmental Data</td> <td colspan="2" data-bbox="531 1518 1482 1585"></td> </tr> <tr> <td data-bbox="113 1585 531 1630">Temperature Range</td> <td colspan="2" data-bbox="531 1585 1482 1630">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1630 531 1675">Thermal Shock</td> <td colspan="2" data-bbox="531 1630 1482 1675">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1675 531 1720">Moisture Resistance</td> <td colspan="2" data-bbox="531 1675 1482 1720">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1720 531 1765">Corrosion</td> <td colspan="2" data-bbox="531 1720 1482 1765">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1765 531 1951">RoHS</td> <td colspan="2" data-bbox="531 1765 1482 1951">Compliant</td> </tr> </table>	Environmental Data			Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant									
Environmental Data																										
Temperature Range	-65°C to +165°C																									
Thermal Shock	MIL-STD-202, Method 107, Condition B																									
Moisture Resistance	MIL-STD-202, Method 206																									
Corrosion	MIL-STD-202, Method 101, Condition B																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.