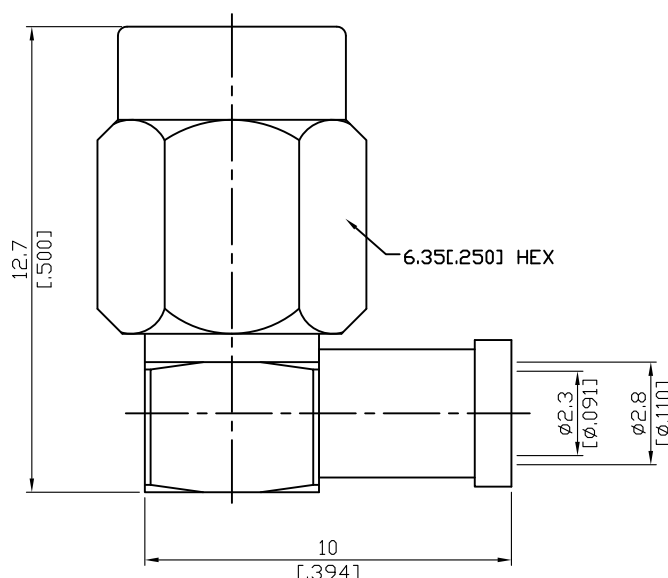


SSMA3300-9405/W

SSMA Plug Solder Right Angle
For Flexible RG405; 18GHz VSWR 1.2*

50Ω



*Using 5002

Parts	Material	Plating (Micro-inch)
Cover	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Suitable Cables: SS405, 5002, 5002LD, T-Flex405, Multibend 405;
Multiflex86; .085SRF-W-P-50-F

This part number complies with RoHS.




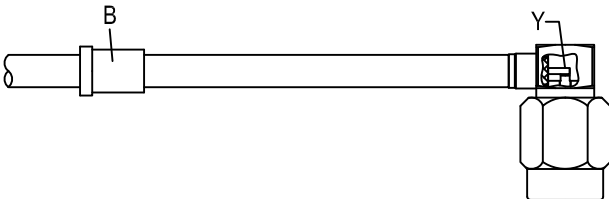
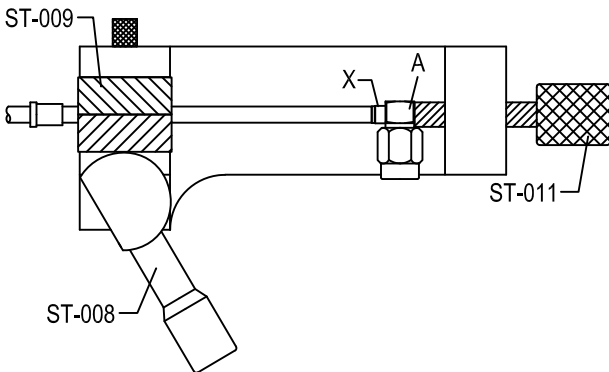
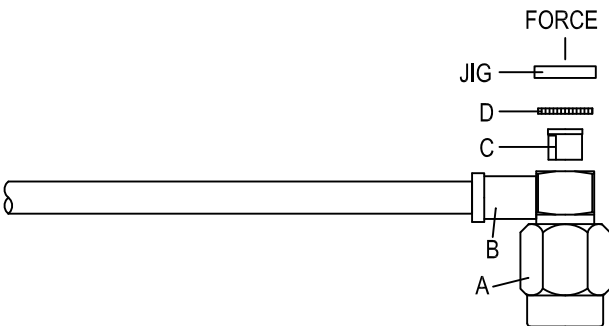
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SSMA	SSMA3300-9405/W																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 18GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC to 18GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤ 0.06 x √f(GHz) dB</td></tr> <tr> <td>Insulation resistance</td><td>≥ 5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤ 4mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤ 2.5mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>750 V rms</td></tr> <tr> <td>Working Voltage (at sea level)</td><td>250 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 18GHz	VSWR	≤ 1.2 (DC to 18GHz)	Insertion loss	≤ 0.06 x √f(GHz) dB	Insulation resistance	≥ 5000MΩ	Contact resistance inner conductor	≤ 4mΩ	Contact resistance outer conductor	≤ 2.5mΩ	Dielectric withstanding voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms
Impedance	50Ω																		
Frequency range	DC to 18GHz																		
VSWR	≤ 1.2 (DC to 18GHz)																		
Insertion loss	≤ 0.06 x √f(GHz) dB																		
Insulation resistance	≥ 5000MΩ																		
Contact resistance inner conductor	≤ 4mΩ																		
Contact resistance outer conductor	≤ 2.5mΩ																		
Dielectric withstanding voltage (at sea level)	750 V rms																		
Working Voltage (at sea level)	250 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>4 inch lbs</td></tr> <tr> <td>Coupling proof torque</td><td>5 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥ 60 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥ 5 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Recommended coupling nut torque	4 inch lbs	Coupling proof torque	5 inch lbs	Coupling nut retention force	≥ 60 lbs	Contact captivation-axial	≥ 5 lbs	Durability (mating)	≥ 500								
Recommended coupling nut torque	4 inch lbs																		
Coupling proof torque	5 inch lbs																		
Coupling nut retention force	≥ 60 lbs																		
Contact captivation-axial	≥ 5 lbs																		
Durability (mating)	≥ 500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition A</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition A	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition A																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Soldering fixture</td><td>ST-008</td></tr> <tr> <td>Insert for .085 semi-rigid cable</td><td>ST-009</td></tr> <tr> <td>Locator tool</td><td>ST-011</td></tr> </table>		Soldering fixture	ST-008	Insert for .085 semi-rigid cable	ST-009	Locator tool	ST-011												
Soldering fixture	ST-008																		
Insert for .085 semi-rigid cable	ST-009																		
Locator tool	ST-011																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

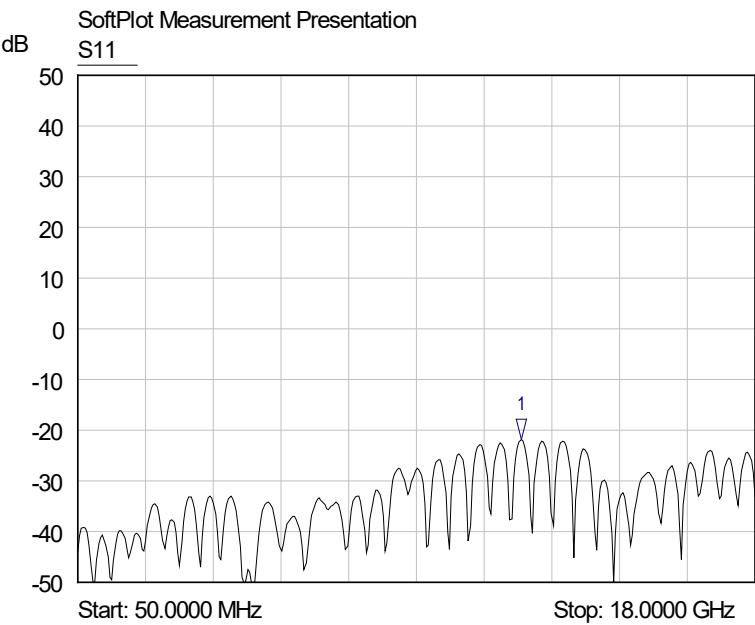
JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SSMA3300-9405/W		DATE	2018/12/26	REV	—									
<table><tr><td>A</td><td>B</td><td>C</td></tr><tr><td></td><td></td><td></td></tr><tr><td>BODY</td><td>BARREL</td><td>COVER</td></tr></table>						A	B	C				BODY	BARREL	COVER
A	B	C												
														
BODY	BARREL	COVER												
DIAGRAM			ASSEMBLY INSTRUCTION											
			Step 1: STRIP AS SHOWN.											
			Step 2: SLIDE FERRULE " B " OVER CABLE. Step 3: SLIDE CENTER CONDUCTOR ON THE CONTACT PIN OF CONNECTOR " A " AND SOLDER IN " Y ".											
			Step 4: USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X ".											
			Step 5: PRESS FERRULE " B " ON THE CONNECTOR BODY " A ". Step 6: SLIDE FERRULE " C " INTO CONNECTOR BODY " A ". Step 7: PRESS ON THE TOP OF " D " WITH JIGS.											
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.														
APPROVED		CHECKED		DRAWING										
				Albert										

SSMA3300-9405/W

S11



1 S11
▽ 11.8000 GHz
-21.86 dB